arXiv:1201.3140v1 [cs.IT] 16 Jan 2012

Distributed Soft Coding with a Soft Input Soft Output (SISO) Relay Encoder in Parallel Relay Channels

Yonghui Li and Branka Vucetic

Abstract

In this paper, we propose a new distributed coding structure with a soft input soft output (SISO) relay encoder for error-prone parallel relay channels. We refer to it as the distributed soft coding (DISC). In the proposed scheme, each relay first uses the received noisy signals to calculate the soft symbol estimate (SSE) of the source symbols. A simple SISO encoder is developed to encode the SSEs of source symbols based on a constituent code generator matrix. The SISO encoder outputs at different relays are then forwarded to the destination and form a distributed codeword. The performance of the proposed scheme is analyzed. It is shown that its performance is determined by the generator sequence weight (GSW) of the relay constituent codes, where the GSW of a constituent code is defined as the number of ones in its generator sequence. A new coding design criterion for optimally assigning the constituent codes to all the relays is proposed based on the analysis. Results show that the proposed DISC can effectively circumvent the error propagation due to the decoding errors in the conventional decode and forward (DF) protocols and at the same time bring considerable coding gains, compared to the conventional soft information relaying (SIR).

Index Terms

Cooperative communications; Decode and Forward; Distributed Coding; Relay Networks, Soft Coding.

Yonghui Li and Branka Vucetic are with School of Electrical and Information Engineering, University of Sydney, Sydney, NSW, 2006, Australia. Tel: 61 2 9351 2236, Fax: 61 2 9351 3847. Email: yonghui.li@sydney.edu.au

I. INTRODUCTION

In wireless networks, the transmitted signal is overheard by all nodes in the vicinity of the transmitter. Similarly, a receiver can hear transmissions from multiple neighbouring nodes. This broadcast nature of wireless networks provides unique opportunities for collaborative and distributed signal processing techniques. Nodes other than the intended destination can listen to a signal at no additional transmission cost and it is globally efficient for these nodes to forward the information to the destination. This process of transmitting data from source to destination via one or more nodes is referred to as relaying, which has shown to yield spatial diversity and great power savings [1-2].

Two most frequently used relaying protocols in relay networks are amplify and forward (AF) and decode and forward (DF) [1-3]. Recently, some variations of AF and DF protocols have been proposed to further improve the performance of relayed transmission, such as selective DF (S-DF) [1], soft information relaying (SIR) and adaptive relaying protocol (ARP) [9]. Among them, the SIR scheme has recently attracted a lot of interest due to its superior performance [4-8, 23-28]. It is well known that the main performance degradation in a DF protocol is caused by the error propagation during the decoding and relay encoding process when decoding errors occur at the relay. One way of alleviating error propagation is to calculate and forward the corresponding soft information instead of making a decision based on the transmitted information symbols at the relay. Forwarding soft information at the relays provides additional information to the destination decoder to make decisions, instead of making premature decisions at the relay decoder. Thus SIR outperforms both AF and DF protocols.

Recently, some distributed coding schemes have been proposed to exploit the spatial diversity and the distributed coding gains in wireless relay networks [10-17]. By applying the space time coding principle, distributed space time codes [10-13] have been proposed for wireless relay networks. To further improve the system performance, the distributed low density parity check (LDPC) codes [14, 15] and distributed turbo codes (DTC) [16-18] have been developed for a 2-hop single relay network. However, most of the existing distributed coding schemes are based on the DF relaying protocols and assume that either relays can always decode correctly or relays will not forward when they cannot decode correctly. Few of them have actually considered how to perform relay encoding when there are decoding errors in the source to relay links. In [4, 7, 8, 23], distributed schemes with soft information encoding have been developed for a relaying system containing only one relay when imperfect decoding occurs at the relay. In this scheme, instead of making decisions on the transmitted information symbols at the relay as in other distributed coding schemes [16-18], the relay calculates and forwards the corresponding soft estimates. It has been shown that the soft information encoding can effectively mitigate error propagation caused by the imperfect decoding and thus improve the system performance. The soft information encoding methods proposed in these papers are basically a probability inference method developed for the convolutional codes. The encoding process is complicated and also it only considered one relay.

Till now it is still unknown what is the optimal way to encode the noisy estimates of the source symbols to circumvent error propagation in the encoding process at the relay and simultaneously provide significant distributed coding gains. It is still unclear if encoding these noisy estimates can bring any further gains. A general framework for designing and analyzing distributed coding in a general error-prone relay channel is needed.

In this paper, we propose a simple distributed coding scheme with soft input soft output (SISO) relay encoders for a two-hop parallel relay network with one source, multiple parallel relays and one destination. We refer to the proposed scheme as the distributed soft coding (DISC). In DISC, different relays exploit a SISO encoder to encode the received analog signals using different constituent codes. The proposed SISO relay encoder has a very simple encoding structure and can be implemented by using the structure of conventional channel encoders in the complex number domain. It performs the encoding of the noisy source symbol estimates at the relays. We have proved that the soft symbol estimates (SSEs), or known as ”soft bits” representing the expected values of source symbols, are the optimal inputs to the SISO encoder in terms of maximizing the encoder output SNR. Therefore in the DISC each relay first calculates the SSEs of the source symbols and the SSEs are subsequently encoded by using the proposed SISO encoder, whose outputs are then forwarded to the destination. At the destination, the signals forwarded from various relays form a distributed codeword.

The performance of the DISC is then analyzed. It is shown that its performance is determined by the generator sequence weights (GSWs) of the relay constituent codes, where the GSW of a constituent code is defined as the number of ones in its generator sequence. To optimize the BER performance, one should make the GSW of each constituent code as large as possible by increasing the memory length of the relay encoder. This is the same as for the conventional convolutional codes. However, the GSWs cannot be chosen arbitrarily, as the code may become catastrophic for certain combinations of GSW values. For most of conventional noncatastrophic convolutional codes, GSWs are different for different constituent codes. Given K GSWs of K constituent codes, we need to determine what is the optimal way of pairing off the K constituent codes with K relays. A coding design criterion is proposed based on the BER performance analysis of the DISC. It is shown that for the optimal pairing one should match the GSW value of a constituent code to the corresponding input SNRs of a relay and assign the constituent code with a large GSW to the relay with a large input SNR. Simulation results show that the proposed DISC with optimal pairing is superior to the DISC with the un-ordered pairing. It is also shown that the DISC can effectively overcome error propagation in the encoding process at the relays and thus significantly outperforms the conventional DF schemes. Furthermore, unlike the DF scheme, where the error performance degrades as the number of encoder states increases, the performance of the proposed DISC greatly improves as the number of encoder states increases thus bringing significant distributed coding gains compared to the conventional soft information relaying (SIR) without relay encoding.

The main contributions of the paper are briefly summarized as follows:

- Design of a general soft input soft output channel encoder structure for any linear code, which can be described by a generator matrix.
- Design of a general distributed soft encoding (DISC) scheme for encoding noisy estimates of the transmitted source symbols at relays;
- Derivation of a simple performance bound and a new design criterion for DISC based on this bound for general parallel relay channels.

Notations: In this paper, we use a lowercase and capital bold face letter to denote a vector and a matrix. The modulated signal of a symbol $b(n)$ is denoted as $x_b(n)$ and the soft estimate of $b(n)$, given its a posteriori probability, is denoted as $\tilde{x}_b(n)$.

II. SYSTEM MODEL

In this paper, we consider a general 2-hop parallel relay network shown in Fig. 1. It consists of one source, K relays and one destination. We assume that there is no direct link between the source and destination as it is too weak compared to the relay links and is thus ignored.

Let $\mathbf{b} = (b(1), \cdots, b(n), \cdots, b(N))$ be a binary information sequence of length N, generated by a source node. We assume that no channel coding is performed at the source node. $\mathbf{b}$ is first modulated into a signal sequence $\mathbf{x_b} = (x_b(1), \cdots, x_b(n), \cdots, x_b(N))$ and then transmitted, where $x_b(n)$ is a modulated signal of $b(n)$. For simplicity, in this paper, we consider the BPSK modulation and assume that the symbol 0 and 1 are modulated into 1 and -1, respectively. Similar to [1, 2, 8, 9], we assume that the source and relays transmit signals over orthogonal channels. We will concentrate on a time division scheme, for which each node transmits in a separate time slot. The source first broadcasts the signals $\mathbf{x_b}$ to all K parallel relays. Let $\mathbf{r}_{sr_k} = \big(r_{sr_k}(1), \cdots, r_{sr_k}(N)\big)$ be the signals received at relay k, where

$$r_{sr_k}(n) = \sqrt{P_{sr_k}} h_{sr_k} x_b(n) + \eta_{r_k}(n), \tag{1}$$

$P_{sr_k} = P_s L_{sr_k}$ is the average power received at relay k, P_s is the source transmit power, L_{sr_k} and h_{sr_k} are the pathloss and channel gain between the source and relay k, and $\eta_{r_k}(n)$ is a zero mean complex Gaussian noise with variance of σ_n^2.

Upon receiving signals from the source, relay k applies a SISO encoder to encode the received analog signals $\mathbf{r}_{sr_k}$ by using its assigned rate-1 constituent code and generate the soft symbol estimates (SSEs) for codeword $\mathbf{c} = (c(1), \cdots, c(n), \cdots, c(N))$ of information bits $\mathbf{b}$, denoted by $\tilde{\mathbf{x}}_{c_k} = (\tilde{x}_{c_k}(1), \cdots, \tilde{x}_{c_k}(N))$. Then the signals transmitted from relay k can be written as

$$x_{r_k}(n) = \beta_k \tilde{x}_{c_k}(n), \tag{2}$$

β_k is a normalization factor calculated from the transmitted power constraint at relay k, given by

$$\beta_k = \sqrt{P_r / P_{x_k}}, \tag{3}$$

where $P_{x_k} = E\left(|\tilde{x}_{c_k}(n)|^2\right)$ and P_{r_k} is the transmit power at relay k. The corresponding received signal at the destination can be written as

$$y_{r_k d}(n) = \sqrt{L_{r_k d}} h_{r_k d} x_{r_k}(n) + w_{r_k d}(n) \tag{4}$$

where $L_{r_k d}$ and $h_{r_k d}$ are the pathloss and channel gain between relay k and the destination with a zero mean and unit variance, and is a zero mean complex Gaussian noise with variance of σ_n^2.

As a result, different relays generate different portions of a codeword using different constituent codes and code sequences forwarded by all relays form a distributed codeword.

III. DISTRIBUTED SOFT CODING WITH A SISO RELAY ENCODER

In this section, we will design the relay function from a coding perspective and introduce a distributed soft coding (DISC) structure based on a SISO encoder for relay channels. It enables the relay to directly encode the source symbol soft estimates.

A. *SISO Encoder Using Generator Matrix*

In this subsection, we first introduce our proposed SISO encoder process using a single constituent code of rate 1 and then extend it to a general two-hop relay network using multiple constituent codes in Section 3.3. In this paper, we focus on the convolutional codes (CC). The results can be extended to other channel codes. In the interest of clarity, let us first consider a SISO encoder for a single constituent CC of four states.

Example 1: We consider a rate-1 CC with the generator sequence of $\mathbf{g}^{PS} = (1\ 1\ 1)$ whose generator matrix $\mathbf{G}$ and the trellis diagram are shown below, where the superscript ”PS” refers to the ”polynomial

$$\mathbf{G} = \begin{pmatrix} \mathbf{g}_1 \\ \mathbf{g}_2 \\ \mathbf{g}_3 \\ \vdots \\ \mathbf{g}_N \end{pmatrix} = \begin{pmatrix} 1 & 1 & 1 & 0 & 0 & \cdots & 0 & 0 \\ 0 & 1 & 1 & 1 & 0 & 0 & \cdots & 0 \\ 0 & 0 & 1 & 1 & 1 & 0 & \cdots & 0 \\ \vdots & & & \ddots & \ddots & & & \vdots \\ 0 & \cdots & 0 & 0 & 0 & 1 & 1 & 1 \end{pmatrix}$$

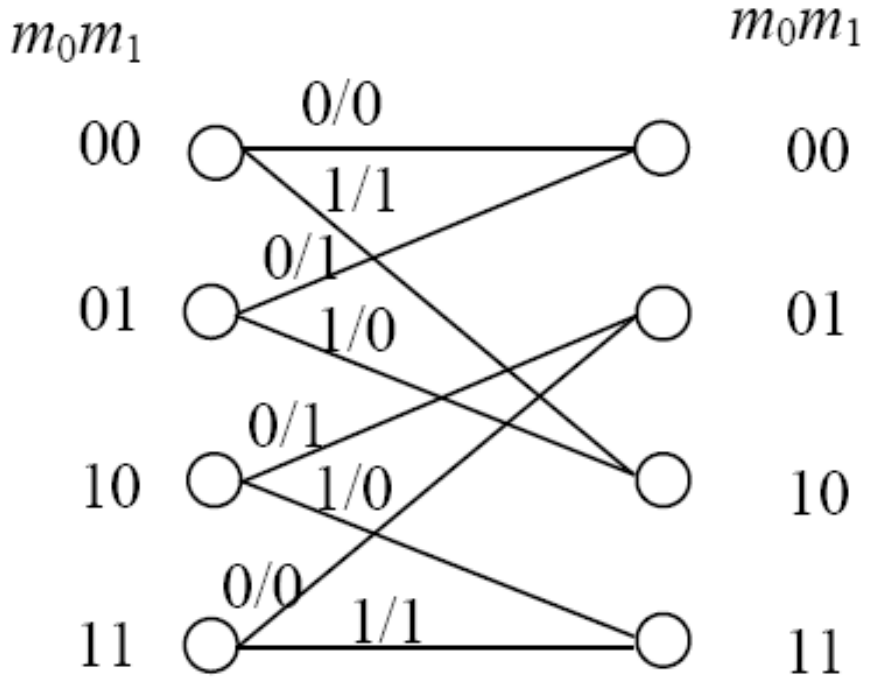

sequence", where m_0m_1 in the trellis represent the encoder state and m_i denotes the value of the $i+1$-th shift register in the encoder. Let us denote by $\mathbf{c} = (c(1), \cdots, c(N))$ the encoder output codeword of information bits $\mathbf{b}$, generated by the generator matrix $\mathbf{G}$, where $c(n)$ is the n-th code symbol of $\mathbf{b}$. Let $\mathbf{x}_c = (x_c(1), x_c(2), \cdots, x_c(N))$ represent the modulated sequence of $\mathbf{c}$.

Let $\mathbf{r}$ be a vector of analog signals, carrying information bits $\mathbf{b} = (b(1), \cdots, b(N))$. Let us denote the a posteriori probability (APP) vector of $\mathbf{b}$, given $\mathbf{r}$, by

$$\mathbf{Pr}_\mathbf{r} = \{(\mathrm{Pr}_0(1), \mathrm{Pr}_1(1)), \cdots, (\mathrm{Pr}_0(n), \mathrm{Pr}_1(n)), \cdots, (\mathrm{Pr}_0(N), \mathrm{Pr}_1(N))\} \tag{5}$$

where $Pr_0(n)$ and $Pr_1(n)$ are the APPs of $b(n) = 0$ and $b(n) = 1$, given $\mathbf{r}$ at time n. Given the APPs of $\mathbf{b}$, the soft symbol estimate (SSE) (or known as the soft bit) of $b(n)$, denoted by $\tilde{x}_b(n)$, representing the expected value of $x_b(n)$, can be calculated as

$$\tilde{x}_b(n) = E(x_b(n)|\mathbf{r}) = Pr_0(n) - Pr_1(n) \tag{6}$$

Given $\mathbf{r}$, or equivalently, given the SSEs of information bits $\mathbf{b}$, now let us look at how to calculate the SSEs of the codeword $c(n)$ of $\mathbf{b}$, denoted by $\tilde{x}_c(n)$.

To calculate the SSEs of the codeword $\mathbf{c}$, let us first use the probability inference method in [8] to calculate the probabilities of $\mathbf{c}$, denoted by $\Pr(x_c(n)|\mathbf{p}_r)$, as follows

$$\Pr(x_c(n) = q|\mathbf{p}_r) = \sum_{m \in U(x_c(n)=q)} \Pr_{c_b}(n) \Pr(S_m(n)) \tag{7}$$

$$\Pr(S_m(n+1)) = \sum_{m'} \Pr(S_m(n)|S_{m'}(n)) \Pr(S_{m'}(n)) = \sum_{m'} \Pr_{b_n(m,m')}(n) \Pr(S_{m'}(n)) \tag{8}$$

where $S_0(n)$, $S_1(n)$, $S_2(n)$ and $S_3(n)$ represent the encoder states of m_0m_1=00, 01, 10 and 11 at time n, respectively, $U(x_c(n) = q)$ is the set of branches, whose encoder output is equal to q, c_b is the corresponding input information bit, $\Pr_{c_b}(n)$ is the probability of c_b at time n, $b_n(m, m')$ represents the input information bit resulting in the transition from state m' at time n to m at time $n+1$, and $\Pr_{b_n(m,m')}(n)$ is the probability of information bit $b_n(m,m')$ at time n.

As shown in (7), the probability of encoder output $x_c(n) = q$ is equal to the summation of probabilities of branches whose output at time n is q, where the probability of each branch is equal to the multiplication of the probabilities of the originating state and corresponding input. Similarly according to (8), the probability of next state being m is equal to the summation of probabilities of branches at time n whose next state is m.

Then according to (7) and (8) and the trellis diagram in the Example 1, we have

$$\Pr\left(x_c(n) = +1|\mathbf{p}_r\right) = \Pr(S_0(n))Pr_0(n) + \Pr(S_1(n))Pr_1(n) + \Pr(S_2(n))Pr_1(n) + \Pr(S_3(n))Pr_0(n) \quad (9)$$

$$\Pr\left(x_c(n) = -1|\mathbf{p}_r\right) = \Pr(S_0(n))Pr_1(n) + \Pr(S_1(n))Pr_0(n) + \Pr(S_2(n))Pr_0(n) + \Pr(S_3(n))Pr_1(n) \quad (10)$$

$$\begin{aligned}
\Pr\left(S_0(n+1)\right) &= \Pr(S_0(n))Pr_0(n) + \Pr(S_1(n))Pr_0(n); && (11)\\
\Pr\left(S_1(n+1)\right) &= \Pr(S_2(n))Pr_0(n) + \Pr(S_3(n))Pr_0(n); && (12)\\
\Pr\left(S_2(n+1)\right) &= \Pr(S_0(n))Pr_1(n) + \Pr(S_1(n))Pr_1(n); && (13)\\
\Pr\left(S_3(n+1)\right) &= \Pr(S_2(n))Pr_1(n) + \Pr(S_3(n))Pr_1(n). && (14)
\end{aligned}$$

By using the above equations alternatively, we can derive the probability of encoder outputs at each time for the encoder shown in Example 1. Initially, we have $Pr(S_0(0)) = 1$ and $Pr(S_j(0)) = 1$ for $j \neq 0$.

- At time $n = 1$, substitute $Pr_0(1)$, $Pr_1(1)$ into (11)-(14) and (9)-(10), we have

$Pr(S_0(1)) = Pr_0(1)$; $Pr(S_1(1)) = 0$; $Pr(S_2(1)) = Pr_1(1)$; $Pr(S_3(1)) = 0$;

$\Pr\left(x_c(1) = +1|\mathbf{p}_r\right) = Pr_0(1)$; $\Pr\left(x_c(1) = -1|\mathbf{p}_r\right) = Pr_1(1)$

$\tilde{x}_c(1) = \Pr\left(x_c(1) = +1|\mathbf{p}_r\right) - \Pr\left(x_c(1) = -1|\mathbf{p}_r\right) = \Pr_0(1) - \Pr_1(1) = \tilde{x}_b(1)$;

- Similarly, at time n =2, we have

$Pr(S_0(2)) = Pr_0(2)Pr_0(1)$; $Pr(S_1(2)) = Pr_0(2)Pr_1(1)$;

$Pr(S_2(2)) = Pr_1(2)Pr_0(1)$; $Pr(S_3(2)) = Pr_1(2)Pr_1(1)$;

$\Pr\left(x_c(2) = +1|\mathbf{p}_r\right) = Pr_0(2)Pr_0(1) + Pr_1(2)Pr_1(1)$;

$\Pr\left(x_c(2) = -1|\mathbf{p}_r\right) = Pr_1(2)Pr_0(1) + Pr_0(2)Pr_1(1)$

$\tilde{x}_c(2) = \Pr\left(x_c(2) = +1|\mathbf{p}_r\right) - \Pr\left(x_c(2) = -1|\mathbf{p}_r\right) = (\Pr_0(2) - \Pr_1(2))(\Pr_0(1) - \Pr_1(1)) = \tilde{x}_b(2)\tilde{x}_b(1)$;

By following the similar calculations, (11)-(14) and $\tilde{x}_c(n)$ can be easily generalized for $n \geq 2$ as follows,

$$Pr(S_0(n)) = Pr_0(n)Pr_0(n-1); Pr(S_1(n)) = Pr_0(n)Pr_1(n-1); \tag{15}$$

$$Pr(S_2(n)) = Pr_1(n)Pr_0(n-1); Pr(S_3(n)) = Pr_1(n)Pr_1(n-1); \tag{16}$$

$$\tilde{x}_c(n) = \tilde{x}_b(n)\tilde{x}_b(n-1)\tilde{x}_b(n-2) \tag{17}$$

Let us define $\mathbf{ln\tilde{x}}_b = (\ln \tilde{x}_b(1), \cdots, \ln \tilde{x}_b(N))$ and $\mathbf{ln\tilde{x}}_c = (\ln \tilde{x}_c(1), \cdots, \ln \tilde{x}_c(N))$, where for a complex number $x = re^{j\theta}$, $\ln x = \ln |r| + j\theta$. Therefore, for a negative real number $x < 0$, $\ln x = \ln |x| + j\pi$. Then Eq. (17) can be further written as

$$\ln \tilde{x}_c(n) = \ln \tilde{x}_b(n) + \ln \tilde{x}_b(n-1) + \ln \tilde{x}_b(n-2) = \mathbf{g}_n \left(\mathbf{ln\tilde{x}}_b\right)^T \tag{18}$$

$$\mathbf{ln\tilde{x}}_c = \mathbf{G}(\mathbf{ln\tilde{x}}_b)^T \tag{19}$$

where $\mathbf{g}_n$ is the n-th row of $\mathbf{G}$.

(18) and (19) are derived for an example constituent convolutional code (CC), but they can be applied to the general convolutional codes and other channel codes, which can be described by a generator matrix $\mathbf{G}$, as shown in the following theorem.

Theorem 1 - SISO Encoder: Let $\tilde{x}_b(n)$ represent the input soft symbol estimate (SSE) to a channel encoder. Then given a generator matrix $\mathbf{G} = (\mathbf{g}_1, \mathbf{g}_{2,} \cdots, \mathbf{g}_N)^T$ of a rate-1 linear constituent code, where $\mathbf{g}_n^T$ is the n-th row of $\mathbf{G}$ and ij-th element of $\mathbf{G}$ is denoted by g_{ij}, $g_{ij} \in \{0, 1\}$, the logarithm of the SISO encoder outputs for the soft inputs $\mathbf{ln\tilde{x}}_b$, denoted by $\mathbf{ln\tilde{x}}_c$, can be calculated as

$$\mathbf{ln\tilde{x}}_c = \mathbf{G}(\mathbf{ln\tilde{x}}_b)^T \tag{20}$$

The corresponding soft encoder outputs are given by

$$\tilde{x}_c(n) = \exp\left(\ln \tilde{x}_c(n)\right) = \exp\left(\mathbf{g}_n(\mathbf{ln\tilde{x}}_b)^T\right) \tag{21}$$

It can be further expressed as

$$\begin{aligned} \tilde{x}_c(n) &= \exp\left(\ln \tilde{x}_c(n)\right) = \exp\left(\mathbf{g}_n(\mathbf{ln\tilde{x}}_b)^T\right) = \exp\left(\sum_{i=1}^{N} g_{ni} \ln \tilde{x}_b(i)\right) = \prod_{i=1}^{N} \exp\left(\ln\left(\tilde{x}_b(i)\right)^{g_{ni}}\right) \\ &= \prod_{i=1}^{N} \left(\tilde{x}_b(i)\right)^{g_{ni}} = \prod_{i \in \{U_n\}} \tilde{x}_b(i) \end{aligned} \tag{22}$$

where $U_i = \{g_{ij} = 1, j = 1, ..., N\}$ is the set of non-zero coefficients in $\mathbf{g}_i = (g_{i1}, g_{i2}, \cdots, g_{iN})$, $i = 1, ..., N$.

Proof: See Appendix A.

Note: Theorem 1 is very important, as it formulates a simple SISO encoder structure, which can be implemented by using a convolutional encoder structure, but the difference is that the addition operation in the SISO convolutional encoder is done in a complex domain, not in binary domain. For example, Fig. 2 shows a simple implementation of a SISO encoder for Example 1. We can see that the SISO channel encoder can be implemented by adding a logarithm and an exponential module at the front and the back of the conventional encoder, respectively.

B. Modeling of Soft Symbol Estimates

In this section, we will derive a statistical model for SSE, which will be used for analyzing the performance of the DISC scheme in the next section.

As shown in [6, 8, 21], the SSE of symbol $x_b(n)$, denoted by $\tilde{x}_b(n)$, can be represented by the following model

$$\tilde{x}_b(n) = x_b(n)\left(1 - \tilde{w}_{in}(n)\right) = x_b(n)\left(1 - \mu_{\tilde{w}}\right) + w_{in}(n) = \alpha x_b(n) + w_{in}(n) \tag{23}$$

where $w_{in}(n) = -x_b(n)\left(\tilde{w}_{in}(n) - \mu_{\tilde{w}}\right)$ is the noise term in the SSE with a zero mean and variance of σ_{in}^2, $\tilde{w}_{in}(n) > 0$ is an equivalent noise independent of $x_b(n)$ with a mean $\mu_{\tilde{w}}(n)$ and variance of $\sigma_{\tilde{w}}^2$, and $\alpha = 1 - \mu_{\tilde{w}}$. It can be easily verified that $x_b(n)$ and $w_{in}(n)$ are independent.

By substituting Eq. (23) into (22), we have

$$\tilde{x}_c(n) = \prod_{j\in\{U_n\}} \tilde{x}_b(j) = \prod_{j\in\{U_n\}} \left(\alpha x_b(j) + w_{in}(j)\right) \tag{24}$$

For simplicity, in the following sections, we consider a non-recursive convolutional code (NRCC) as the constituent code in the SISO encoder. Let denote by $|U_n|$ the number of elements in U_n. For the NRCC, we have $|U_n| = d_0$, which we refer to as the row degree of $\mathbf{G}$ or the generator sequence weight (GSW) of $\mathbf{g}^{PS}$. Let $\mathbf{x}_c = (x_c(1), x_c(2), \cdots, x_c(N))$ represent the modulated sequence of $\mathbf{c}$. Then we have

$$\tilde{x}_c(n) = \prod_{j\in\{U_n\}} \tilde{x}_b(j) = \prod_{j\in\{U_n\}} \left(\alpha x_b(j) + w_{in}(j)\right) = \alpha^{d_0} \prod_{j\in\{U_n\}} x_b(j) + w_{out}(n) = \alpha^{d_0} x_c(n) + w_{out}(n), \tag{25}$$

where $x_c(n) = \prod\limits_{j\in\{U_n\}} x_b(j)$ is the modulated signal of n-th code bit $c(n)$ of $\mathbf{b}$, and $w_{out}(n)$ is the equivalent noise of the soft encoder output with a zero mean and variance of

$$\sigma_{out}^2 = \left(\alpha^2 + \sigma_{in}^2\right)^{d_0} - \alpha^{2d_0} \tag{26}$$

In the above, we have introduced a SISO encoder. The SISO encoder structure is obtained when the inputs to the encoder are the soft symbol estimates (SSE). We can directly apply the above SISO encoder structure to any analog input signals carrying the source symbol information. That is, given any analog input signals $\mathbf{z}_b = (z_b(1), \cdots, z_b(N))$ containing information symbols $\mathbf{x}_b$, the corresponding k-th SISO encoder output signal $\tilde{x}_c(k)$ can be calculated as

$$\tilde{x}_c(n) = \exp\left(\mathbf{g}_n(\mathbf{lnz}_b)^T\right) = \exp\left(\sum_{i=1}^{N} g_{ni} \ln z_b(i)\right) = \prod_{j \in \{U_n\}} z_b(j) \tag{27}$$

where $\mathbf{lnz}_b = (\ln z_b(1), \cdots, \ln z_b(N))$.

Its encoding process can be implemented by a similar SISO encoder as shown in Fig. 2. It is important to note, as will be proved below, that the SSE is the optimal input to the SISO encoder in terms of maximizing the SISO encoder output SNR.

Theorem 2: Given an input analog signal carrying the source information symbol, the soft symbol estimate of source information symbol is the optimal input to the soft encoder in terms of maximizing the SNR of the SISO encoder output.

Proof: See Appendix B.

In the following, we all assume that the input to the SISO encoder is the SSE of the source information symbol.

C. Distributed Soft Coding (DISC) based on the SISO Encoder

In this section, we introduce a distributed soft coding (DISC) scheme based on the SISO encoder described in Section 3.1. We assume that there are K relays. The generator sequence and generator matrix for relay k are $\mathbf{g}_k^{PS}$ and $\mathbf{G}_k$, with row degree of d_k, respectively. Let $\mathbf{c}_k = (c_k(1), \cdots, c_k(N))$ be the codeword of information bits **b** generated by $\mathbf{G}_k$, where $c_k(n)$ is the n-th code symbol of **b**. Let $\mathbf{x}_{c_k} = (x_{c_k}(1), x_{c_k}(2), \cdots, x_{c_k}(N))$ represent the modulated sequence of $\mathbf{c}_k$. Fig. 3 shows the proposed encoder structure at relay k. Upon receiving signal, relay k first calculates the SSE of the source information symbol, denoted by $\tilde{x}_{b_k}(n)$. The relay k then applies the SISO encoder to encode $\tilde{x}_{b_k}(n)$, based on the given generator sequence $\mathbf{g}_k^{PS}$, to generate the SSEs of its code sequence $\mathbf{c}_k$. Let $\tilde{x}_{c_k}(n)$ be the corresponding soft encoder output at relay k at time n. It can be expressed as

$$\tilde{x}_{c_k}(n) = (\alpha_k)^{d_k} x_{c_k}(n) + w_{out,k}(n) \tag{28}$$

where $\alpha_k = 1 - \mu_{\tilde{w},k}$, $\mu_{\tilde{w},k}$ is the mean of equivalent noise $\tilde{w}_{in}(n)$ in the SSE at relay k shown in (23), and $w_{out,k}(n)$ is the equivalent noise at the soft encoder output with a zero mean and variance of

$$\sigma_{out,k}^2 = \left(\alpha_k^2 + \sigma_{in,k}^2\right)^{d_k} - \alpha_k^{2d_k} \tag{29}$$

$\sigma_{in,k}^2$ is the variance of the equivalent noise $w_{in}(n)$ in the soft input to the SISO encoder of relay k, as shown in (23).

For simplicity, we assume that all relays transmit at the same power P_r. Then the signals transmitted from relay k can then be written as

$$x_{r_k}(n) = \beta_k \tilde{x}_{c_k}(n) \tag{30}$$

where β_k is a normalization factor, given by

$$\beta_k = \sqrt{P_r / P_{x_k}} \tag{31}$$

where $P_{x_k} = E\left(|\tilde{x}_{c_k}(n)|^2\right) = \left(\alpha_k^2 + \sigma_{in,k}^2\right)^{d_k}$.

The destination received signal, transmitted from relay k, can be written as

$$\begin{aligned} y_{r_k d}(n) &= \sqrt{L_r} h_{r_k d} x_{r_k}(n) + w_{r_k d}(n) = \sqrt{L_r} h_{r_k d} \beta_k \left(\alpha_k^{d_k} \tilde{x}_{c_k}(n) + w_{out,k}(n)\right) + w_{r_k d}(n) \\ &= \sqrt{L_r} h_{r_k d} \beta_k \alpha_k^{d_k} \tilde{x}_{c_k}(n) + \tilde{w}_{r_k d}(n) \end{aligned} \tag{32}$$

where L_r is the pathloss from the relay to the destination, $\tilde{w}_{r_k d}(n) = \sqrt{L_r} h_{r_k d} \beta_k w_{out,k}(n) + w_{r_k d}(n)$ is an equivalent noise with a zero mean and variance of

$$\sigma_{r_k d}^2 = \sigma_n^2 + L_r |h_{r_k d}|^2 \beta_k^2 \left[\left(\alpha_k^2 + \sigma_{in,k}^2\right)^{d_k} - \alpha_k^{2d_k}\right] \tag{33}$$

In the above equation, we have used the fact that $E\left(w_{in,i}(n) w_{in,j}(n)\right) = 0$ for the BPSK constellation [6] and thus $E\left(w_{out,i}(n) w_{out,j}(n)\right) = 0$.

IV. PERFORMANCE ANALYSIS AND DISC DESIGN

The SISO encoding at the relays can bring system some coding gains, but on the other hand soft encoding of noisy SSE will enhance the noise power at the destination, as shown in (25-26). It is unclear whether the coding gain can surpass the noise enhancement in the DISC and if such encoding can bring any overall gain. Moreover, given K constituent codes, we need to determine what is the optimal way of pairing off the K constituent codes with K relays. In this section, we will give a quantitative analysis of the DISC scheme performance based on which a coding design criterion is then proposed.

By substituting (31) into (33), the variance of the equivalent destination noise in Eq. (33) can be expanded as

$$\sigma_{r_k d}^2 = \sigma_n^2 + L_r \left|h_{r_k d}\right|^2 \beta_k^2 \left[\left(\alpha_k^2 + \sigma_{in,k}^2\right)^{d_k} - \alpha_k^{2d_k}\right] = \sigma_n^2 + P_r L_r \left|h_{r_k d}\right|^2 \left[1 - \left(1 + 1/\gamma_{sr_k,in}\right)^{-d_k}\right], \tag{34}$$

where $\gamma_{sr_k,in} = \alpha_k^2 / \sigma_{in,k}^2$ is the input SNR of the SISO encoder at the k-th relay.

Let γ_{sr_kd} represent the instantaneous destination SNR, corresponding to the signals generated by the constituent encoder at the k-th relay. Then from (5) and (34), we get

$$\begin{aligned}\gamma_{sr_kd} &= \frac{L_r\left|h_{r_kd}\beta_k\alpha_k^{d_k}\right|^2}{\sigma_{r_kd}^2} = \frac{L_rP_r\left|h_{r_kd}\right|^2\alpha_k^{2d_k}\Big/\left(\alpha_k^2+\sigma_{in,k}^2\right)^{d_k}}{\sigma_n^2+L_rP_r\left|h_{r_kd}\right|^2\left[1-\left(1+1/\gamma_{sr_k,in}\right)^{-d_k}\right]}\\ &= \frac{\gamma_{r_kd}}{\left[\left(1+1/\gamma_{sr_k,in}\right)^{d_k}-1\right]\gamma_{r_kd}+1}\approx\frac{\gamma_{r_kd}\gamma_{sr_k,in}}{d_k\gamma_{r_kd}+\gamma_{sr_k,in}},\end{aligned} \tag{35}$$

where $\gamma_{r_kd}=P_rL_r\left|h_{r_kd}\right|^2/\sigma_n^2$ is the instantaneous SNR in the link from relay k to the destination and the last equation is a high SNR approximation.

Since calculating the exact BER is extremely complicated, we consider an asymptotic performance at high SNR, which can give us some insights into the system design. We assume that $\tilde{w}_{r_kd}(n)$ can be approximated as a Gaussian random variable. Then the BER of the DISC scheme can be approximated at high SNR as [21]

$$P_b\approx B_{d_{free}}Q\left(\sqrt{2\sum_{k=1}^{K}d_{\min,k}\gamma_{sr_kd}}\right)\approx 0.5B_{d_{free}}\exp\left(-\sum_{k=1}^{K}d_{\min,k}\gamma_{sr_kd}\right) \tag{36}$$

where $d_{\min,k}$ is the minimum Hamming weight (MHW) of a nonzero codeword, which is also equal to the code minimum Hamming distance (MHD), generated by the constituent encoder of relay k.

Let $d_{\min}$ denote the MHW of a nonzero codeword generated by all K constituent encoders. $d_{\min}$ and $d_{\min,k}$ can be obtained either by simulations or by deriving its bounds. Theorem 3 presents a simple bound for $d_{\min}$ and $d_{\min,k}$.

Theorem 3: Let us consider a non-recursive convolutional code C, generated by K constituent codes $\mathbf{g}_1^{PS},\mathbf{g}_2^{PS},\cdots,\mathbf{g}_K^{PS}$. Let $d_{\min,k}$ represent the MHD of the code generated by the k-th constituent code $\mathbf{g}_k^{PS}$. Let $d_{\min}$ denote by the MHD of the overall codeword generated by K constituent codes. Also let $w_{1,k}$ be the Hamming weight of a codeword generated by the k-th constituent encoder for the input sequence of $(1\ 0\ 0\ 0\cdots0)$. Then we have the following simple bound for $d_{\min}$ and $d_{\min,k}$,

$$d_{\min,k}\leq w_{1,k}=d_k,\ \ and\ d_{\min}\leq\sum_{k=1}^{K}d_k \tag{37}$$

where d_k is the row degree of the generator matrix for the k-th constituent code, which is equal to the number of 1s in its generator sequence $\mathbf{g}_k^{PS}$. We refer to d_k as the generator sequence weight (GSW) of $\mathbf{g}_k^{PS}$.

Proof of this bound is straightforward and we omit it here. Table 1 shows the exact MHDs and the MHD bounds calculated in (37) for rate 1/2, 1/3 and 1/4 codes with various memory lengths. The codes are obtained from [20]. We can see that the difference between the bound in Eq. (37) and the exact MHD is at most 1 for the codes listed in the table and for most of the codes the bound is equal to the exact MHD.

By using the MHD bound in Theorem 3, the BER in Eq. (36) can be further approximated as

$$\begin{aligned} P_b &\approx 0.5B_{d_{free}} \exp\left(-\sum_{k=1}^{K} d_{\min,k}\gamma_{sr_kd}\right) \approx 0.5B_{d_{free}} \exp\left(-\sum_{k=1}^{K} d_k\gamma_{sr_kd}\right) \\ &\approx 0.5B_{d_{free}} \exp\left(-\sum_{k=1}^{K} \frac{d_k\gamma_{r_kd}\gamma_{sr_k,in}}{d_k\gamma_{r_kd}+\gamma_{sr_k,in}}\right) = 0.5B_{d_{free}} \exp\left(-\sum_{k=1}^{K} \frac{1}{\gamma_{r_kd}^{-1}d_k^{-1}+\gamma_{sr_k,in}^{-1}}\right) \\ &= 0.5B_{d_{free}} \exp\left(-\sum_{k=1}^{K} \rho_k\left(d_k,\gamma_{r_kd},\gamma_{sr_k,in}\right)\right) \end{aligned} \tag{38}$$

where

$$\rho_k\left(d_k,\gamma_{r_kd},\gamma_{sr,in,k}\right) = \frac{\gamma_{r_kd}\gamma_{sr_k,in}}{\gamma_{sr_k,in}d_k^{-1}+\gamma_{r_kd}} \tag{39}$$

We can see from Eqs. (38-39) that P_b and $\rho_k\left(d_k,\gamma_{r_kd},\gamma_{sr_k,in}\right)$ are a monotonic decreasing and increasing function of d_k, respectively. To reduce the error rate P_b, one should make the GSW d_k as large as possible by increasing its memory length, as with the conventional convolutional codes. However, d_k, $k = 1,\ldots,K$ cannot be chosen arbitrarily as the code may become catastrophic for certain combinations of GSW values. The code construction has to be non-catastrophic. Some examples of good non-catastrophic codes are shown in Table 1 for various code rates. We can see from these tables that for most of good codes, GSWs are different for different k. Given K GSWs of K constituent codes $(d_1, d_2, \ldots, d_K)$, we need to determine what is the optimal way of pairing off the constituent codes with relays. That is, which constituent code should be used in which relay?

To answer this question, let us first order $\gamma_{sr_k,in}$ in a decreasing order and denote the reordered SNR values as $\left(\gamma_{sr_{(1)},in}, \gamma_{sr_{(2)},in}, \cdots, \gamma_{sr_{(K)},in}\right)$, where

$$\gamma_{sr_{(1)},in} \geq \gamma_{sr_{(2)},in} \geq \cdots \geq \gamma_{sr_{(K)},in} \tag{40}$$

Similarly we also re-order $(d_1, d_2, \ldots, d_K)$ in a decreasing order as follows,

$$d_{(1)} \geq d_{(2)} \geq \cdots \geq d_{(K)} \tag{41}$$

Then we have the following theorem regarding optimally pairing the constituent codes with the relays for AWGN channels.

Theorem 4 - *Design Criterion of DISC for AWGN Channels*: Let us consider a parallel relay network consisting of K relays over AWGN channels. We assume that all relays have the same transmission power and experience the same path loss, that is, $\gamma_{r_kd} = \gamma_{rd}$ for all $k = 1,\ldots,K$. In the DISC, each relay performs a SISO encoding, where the existing good convolutional codes or other linear codes can be chosen as the relay constituent codes. Assume that a good convolutional code generated by K constituent convolutional codes $\mathbf{g}_1^{PS}, \mathbf{g}_2^{PS}, \cdots, \mathbf{g}_K^{PS}$, has already been found. Let us denote by d_k the GSW of $\mathbf{g}_k^{PS}$. Then the optimal code construction in AWGN channels is to assign the code with the k-th largest GSW $d_{(k)}$ to the relay node with the k-th largest input SNR $\gamma_{sr_{(k)},in}$. In this way, the system achieves the optimal BER performance for given constituent codes with generator sequences $\mathbf{g}_1^{PS}, \mathbf{g}_2^{PS}, \cdots, \mathbf{g}_K^{PS}$.

Proof: See Appendix C.

From the above theorem, we can see that in order to minimize the BER P_b for the given K GSWs $(d_{(1)}, d_{(2)}, \ldots, d_{(K)})$, we should match the GSW values to the corresponding input SNRs and assign the constituent code with a large GSW value to the relay with a large SNR.

Let $\bar{\gamma}_{sr_k}$ be the average SNR in the link from the source to relay k. Then by using the fact that $\gamma_{sr_{(k)},in}$ is monotonically increasing function of $\bar{\gamma}_{sr_k}$, we have the following Corollary.

Corollary 1: The optimal code construction of DISC for AWGN channels is to assign the code with the k-th largest GSW $d_{(k)}$ to the relay node with the k-th largest average SNR $\bar{\gamma}_{sr_k}$.

To show the gain of the DISC with the optimal pairing over a DISC with un-ordered pairing and the soft information relaying (SIR), let us consider a simple example.

Example 2: We consider a rate $1/2$ convolutional code of memory length of 3. The generator sequences of two constituent codes are $\mathbf{g}_1^{PS}$=(101) and $\mathbf{g}_2^{PS}$=(111). Then we have $d_{(1)} = 3$ and $d_{(2)} = 2$.

We consider an AWGN channel and assume that the average input SNR of relay 1 is larger than that of relay 2. Then we have $\gamma_{sr_1,in} > \gamma_{sr_2,in}$.

Then according to Corollary 1 the optimal pairing strategy is to assign the constituent code $\mathbf{g}_2^{PS}$=(111) with the maximum GSW to relay 1 with the maximum SNR $\gamma_{sr_1,in}$ and $\mathbf{g}_1^{PS}$=(101) with the minimum GSW to relay 2 with the minimum SNR $\gamma_{sr_2,in}$.

To show the performance gain of the proposed scheme, we assume that $\gamma_{sr_1,in} = \gamma_{gap}\gamma_{rd}$, where $\gamma_{gap} = \gamma_{sr_1,in}/\gamma_{rd}$ and $\gamma_{sr_1,in}/\gamma_{sr_2,in} = \alpha_0$, $\alpha_0 > 1$. Then for an un-ordered pairing, we assume that $\mathbf{g}_1^{PS}$ and $\mathbf{g}_2^{PS}$ are assigned to relays 1 and 2, respectively. Then we have $d_1 = 2$ and $d_2 = 3$ and

$$\rho_1^{un-order}\left(d_1, \gamma_{rd}, \gamma_{sr_1,in}\right) = \frac{\gamma_{gap}^{-1}\gamma_{sr_1,in}\gamma_{sr_1,in}}{\left(\gamma_{sr_1,in}d_1^{-1} + \gamma_{gap}^{-1}\gamma_{sr_1,in}\right)} = \frac{\gamma_{sr_1,in}}{\gamma_{gap}/2 + 1} \tag{42}$$

$$\rho_2^{un-order}\left(d_2, \gamma_{rd}, \gamma_{sr_2,in}\right) = \frac{\gamma_{gap}^{-1}\gamma_{sr_1,in}\gamma_{sr_2,in}}{\left(\gamma_{sr_2,in}d_2^{-1} + \gamma_{gap}^{-1}\gamma_{sr_1,in}\right)} = \frac{\gamma_{sr_1,in}}{1/3\gamma_{gap} + \alpha_0} \tag{43}$$

$$\begin{aligned} \rho^{un-order} &= \sum_{k=1}^{2} \rho_k^{un-order} \left(d_k, \gamma_{rd}, \gamma_{sr_k,in}\right) = \frac{\gamma_{sr_1,in}}{\gamma_{gap}/2+1} + \frac{\gamma_{sr_1,in}}{\gamma_{gap}/3+\alpha_0} \\ &= \gamma_{sr_1,in} \left(\frac{5/3\gamma_{gap} + 2(1+\alpha_0)}{\left(\gamma_{gap}+2\right)\left(\gamma_{gap}/3+\alpha_0\right)} \right) \qquad (44) \end{aligned}$$

For the optimal pairing, we have

$$\rho_1^{opt}\left(d_{(1)}, \gamma_{rd}, \gamma_{sr_{(1)},in}\right) = \frac{\gamma_{gap}^{-1}\gamma_{sr_1,in}\gamma_{sr_1,in}}{\left(\gamma_{sr_1,in} d_{(2)}^{-1} + \gamma_{gap}^{-1}\gamma_{sr_1,in}\right)} = \frac{\gamma_{sr_1,in}}{\gamma_{gap}/3+1} \qquad (45)$$

$$\rho_2^{opt}\left(d_{(1)}, \gamma_{rd}, \gamma_{sr_{(2)},in}\right) = \frac{\gamma_{gap}^{-1}\gamma_{sr_1,in}\gamma_{sr_2,in}}{\left(\gamma_{sr_2,in} d_{(1)}^{-1} + \gamma_{gap}^{-1}\gamma_{sr_1,in}\right)} = \frac{\gamma_{sr_1,in}}{\gamma_{gap}/2+\alpha_0} \qquad (46)$$

$$\rho^{opt} = \sum_{k=1}^{2} \rho_k^{opt}\left(d_{(k)}, \gamma_{rd}, \gamma_{sr_{(k)},in}\right) = \frac{\gamma_{sr_1,in}}{\gamma_{gap}/3+1} + \frac{\gamma_{sr_1,in}}{\gamma_{gap}/2+\alpha_0} = \gamma_{sr_1,in}\left(\frac{5/3\gamma_{gap}+2(1+\alpha_0)}{\left(\gamma_{gap}/3+1\right)\left(\gamma_{gap}+2\alpha_0\right)}\right) \qquad (47)$$

Similarly, for the conventional soft information relaying scheme, $d_1 = d_2 = 1$, and we get

$$\rho_1^{SIR}\left(1, \gamma_{rd}, \gamma_{sr_1,in}\right) = \frac{\gamma_{gap}^{-1}\gamma_{sr_1,in}\gamma_{sr_1,in}}{\left(\gamma_{sr_1,in} + \gamma_{gap}^{-1}\gamma_{sr_1,in}\right)} = \frac{\gamma_{sr_1,in}}{\left(\gamma_{gap}+1\right)} \qquad (48)$$

$$\rho_2^{SIR}\left(1, \gamma_{rd}, \gamma_{sr_2,in}\right) = \frac{\gamma_{gap}^{-1}\gamma_{sr_1,in}\gamma_{sr_2,in}}{\left(\gamma_{sr_2,in} + \gamma_{gap}^{-1}\gamma_{sr_1,in}\right)} = \frac{\gamma_{sr_1,in}}{\left(\gamma_{gap}+\alpha_0\right)} \qquad (49)$$

$$\rho^{SIR} = \sum_{k=1}^{2} \rho_k^{SIR}\left(d_k, \gamma_{rd}, \gamma_{sr_k,in}\right) = \frac{\gamma_{sr_1,in}}{\left(\gamma_{gap}+1\right)} + \frac{\gamma_{sr_1,in}}{\left(\gamma_{gap}+\alpha_0\right)} = \gamma_{sr_1,in}\left(\frac{2\gamma_{gap}+(1+\alpha_0)}{\left(\gamma_{gap}+1\right)\left(\gamma_{gap}+\alpha_0\right)}\right) \qquad (50)$$

Then we have

$$\begin{aligned} \rho^{opt} - \rho^{un-order} &= \frac{\gamma_{gap}\left(\alpha_0-1\right)\left(5\gamma_{gap}+6(1+\alpha_0)\right)}{\left(\gamma_{gap}+3\right)\left(\gamma_{gap}+2\alpha_0\right)\left(\gamma_{gap}+2\right)\left(\gamma_{gap}+3\alpha_0\right)}\gamma_{sr_1,in} > 0 \qquad (51) \\ \rho^{opt} - \rho^{SIR} &= \frac{\gamma_{gap}\left(3\gamma_{gap}^2 + (4+6\alpha_0)\gamma_{gap} + (4\alpha_0^2+3)\right)}{\left(\gamma_{gap}+3\right)\left(\gamma_{gap}+2\alpha_0\right)\left(\gamma_{gap}+1\right)\left(\gamma_{gap}+\alpha_0\right)}\gamma_{sr_1,in} > 0 \qquad (52) \end{aligned}$$

$\rho^{opt} - \rho^{un-order}$ and $\rho^{opt} - \rho^{SIR}$ are the coding gains of the DISC with the optimal code pairing over the DISC with an un-ordered pairing and the conventional SIR scheme, respectively. From Eqs. (51-52), we can see that the DISC with the optimal pairing outperforms the DISC with an un-ordered pairing and the conventional SIR scheme at high SNR.

V. SIMULATION RESULTS AND DISCUSSIONS

In this section, we present the simulation results. All simulations are performed for the BPSK modulation and a frame size of 130 symbols over AWGN and quasi-static fading channels. We assume that all relays use the code with the same number of states. Thus if there are K relays, the convolutional code of rate 1/K with K constituent codes can be used in K relays, and each relay uses one constituent code. For example, for the relay network with 2, 3 and 4 relays, the convolutional codes listed in Table 1 can be used as constituent codes at the relays. All schemes are compared under the same power constraint.

Figs. 4-5 compare the frame error rate (FER) performance of soft information relaying (SIR), the proposed DISC with optimum and un-ordered code pairing, as well as the conventional decode and forward (DF) for various numbers of states over AWGN channels for $\bar{\gamma}_{sr} = \bar{\gamma}_{rd}$, $\bar{\gamma}_{sr} = \bar{\gamma}_{rd}$+3dB, respectively. We also set $\bar{\gamma}_{sr_1} = \bar{\gamma}_{sr}$ and $\bar{\gamma}_{sr_2} = \bar{\gamma}_{sr} + 3dB$. Here the optimal and un-ordered assignment is the same as the assignment given in Example 2. It has been shown in [6, 21] that the SIR scheme is an SNR maximizing estimate and forward protocol and it always outperforms the AF, so we only need to put the SIR scheme as a reference.

We can first note from these figures that the performance of the DF gets worse as the number of relay encoder states increases. Such performance degradation is due to the error propagations in the DF scheme. In the DF scheme, when decoding errors occur at the relays, the process of decoding and encoding causes errors to propagate into subsequent symbols. The longer the encoder memory, the larger the number of subsequent symbols affected by the decoding errors. Therefore, the error rate of the DF will increase with the number of states. For example, Fig. 5 shows that the FER performance of the DF for the 4-state and 8-state codes is worse by 0.5dB and 0.7dB, respectively, than for the 2-state code at the FER of 10^{-3}. However, the SISO encoder in the proposed DISC scheme can effectively mitigate the error propagation in the relay encoding process and at the same time provide a significant distributed coding gain. As a result, the DISC provides significant coding gains compared to the SIR without relay encoding and the gain increases as the number of states increases at high SNR. For example, as shown in Fig. 5, the DISCs with 2, 4 and 8-state are superior to the SIR by about 1.4dB, 1.8dB and 2dB, respectively. This result is consistent with the analysis in Section 4, showing that the DISC performance improves as the number of states at the relay encoder increases. Furthermore, we can also see from the figures that the DISC with optimal code pairing also brings significant gains compared to the DISC with the un-ordered pairing. For example, as shown in Fig. 5, the 4-state code with the optimal code pairing is superior to that with the un-ordered pairing by 2dB at the FER of

10^{-3}. This validates the effectiveness of the proposed design criteria.

Figs. 6-7 compare the performance over fading channels for a network with 2 relays for $\bar{\gamma}_{sr} = \bar{\gamma}_{rd}$, $\bar{\gamma}_{sr} = \bar{\gamma}_{rd}$ +10dB, respectively. We set $\bar{\gamma}_{sr_1} = \bar{\gamma}_{sr_2} = \bar{\gamma}_{sr}$. It can also be observed from the figures that the DISC and SIR can achieve the full diversity order of 2, but the conventional DF can only achieve the diversity order of 1 due to error propagation. The DISC substantially outperforms the SIR scheme over fading channels too. For example, the DISC with 2, 4 and 8 states can bring about 0.7dB, 1.5dB and 1.7dB gains, respectively, relative to the SIR scheme, for $\bar{\gamma}_{sr} = \bar{\gamma}_{rd}$ and the gains are increased to 1dB, 2dB and 2.5dB, respectively, for $\bar{\gamma}_{sr} = \bar{\gamma}_{rd}$+10dB. That is, the coding gain brought by the DISC increases when the source-relay link quality is improved. We can also observe that the coding gain increases as the number of relay encoder states increases.

Figs. 8-11 show the results for three relays over AWGN and fading channels, respectively. From these figures we can observe similar trends as for the case with two relays. That is, the DISC can bring significant gains over the SIR and DF on both AWGN and fading channels and the gains increase as the number of state increases. For the fading channels, both DISC and SIR schemes can achieve the full diversity order of 3 while the DF can only achieve the diversity order of 1. Also pairing can bring system considerable gains over AWGN channels. Furthermore, the coding gain of DISC over SIR slightly increases as the number of relay increases from 2 to 3.

From the above results, we can see that the relay encoding in the conventional DF schemes cause serious error propagation and thus does not provide any coding advantages. By contrary, the proposed DISC can effectively mitigate the error propagation in the relay encoding and provide significant distributed coding gains, thus substantially outperforming the soft information relaying (SIR) and conventional DF schemes.

VI. CONCLUSIONS

In this paper we proposed a new distributed soft coding (DISC) scheme based on a soft input soft output encoder at the relay and the optimal design criteria were proposed. The proposed scheme performs encoding of the noisy source symbols estimates in error-prone relay channels. It can effectively circumvent error propagation in the relay encoding process and at the same time provide significant distributed coding gains. It provides great performance improvement compared to the soft information relaying (SIR) and conventional DF schemes. At high SNR the gain further increases as the number of state increases.

In this paper, we have only considered the design of DISC schemes based on the convolutional codes. However, the DISC can be applied to other channel coding schemes, which can be described by a generator matrix. Thus DISC provides a simple and general way to carry out distributed channel coding on error-prone parallel relay channels. Furthermore in the analysis and simulations we approximated the distribution of the overall destination noise as the Gaussian distribution. As shown in [7, 21], the actual distribution is may not follow the exact Gaussian distribution. Further improvement can be expected when the accurate distribution of the overall destination noise is derived, but unfortunately it has been a challenging topic so far.

VII. APPENDIX

A. *Proof of Theorem 1*

To prove this theorem, let us first prove the following Lemma.

Lemma 1: Let $c(i)$ be the i-th output symbol of a binary encoder generated by $\mathbf{G}$ for source binary sequence $\mathbf{b} = (\mathbf{b(1)}, \cdots, \mathbf{b(N)})$. It is given by

$$c(i) = \mathbf{g}_i \mathbf{b}^T = \sum_{n=1}^{N} g_{in} b(n) \tag{53}$$

where the summation is over GF(2). Let $l_b(n) = \ln\left(\Pr(b(n)=0)/\Pr(b(n)=1)\right)$ represent the log likelihood ratio (LLR) of $b(n)$. Then the LLR of $c(i)$, denoted by $l_c\left(i\right)$, can be calculated as follows

$$l_c\left(i\right) = \ln \frac{\Pr(c(i)=0)}{\Pr(c(i)=1)} = \ln \frac{1+\prod_{n\in U_i} \tanh\left(l_b(n)/2\right)}{1-\prod_{n\in U_i} \tanh\left(l_b(n)/2\right)} \tag{54}$$

where $\tanh(x) = \frac{e^{2x}-1}{e^{2x}+1}$.

The Lemma 1 can be directly proved by using the L-algebra [19]

$$l\left(b(n_1) \oplus b(n_2) \cdots \oplus b(n_k)\right) = \ln L\left(b(n_1) \oplus b(n_2) \cdots \oplus b(n_k)\right) = \ln \frac{1+\prod_{q=1}^{k} \tanh(l_b(n_q)/2)}{1-\prod_{q=1}^{k} \tanh(l_b(n_q)/2)} \tag{55}$$

where $L(x)$ and $l(x)$ denote the likelihood ratio and LLR of x, respectively.

From Lemma 1, we can easily prove the Theorem 1. Let $\tilde{x}_b(k)$ and $l_b\left(k\right)$ represent the SSE and LLR of source bit $b(k)$. Then they have the following relationship,

$$l_b\left(k\right) = \ln \frac{1+\tilde{x}_b(k)}{1-\tilde{x}_b(k)} \tag{56}$$

$$\tilde{x}_b(k) = \tanh\left(l_b(k)/2\right) = \frac{\exp\left(l_b(k)\right)-1}{\exp\left(l_b(k)\right)+1} \tag{57}$$

By substituting Eq. (57) into (54), we have

$$l_c\left(i\right) = \ln \frac{1+\prod_{j\in U_i} \tilde{x}_b(j)}{1-\prod_{j\in U_i} \tilde{x}_b(j)} \tag{58}$$

Then by using the relationship of the SSE and LLR in Eq. (57), the SSE of $c(k)$, denoted by $\tilde{x}_c(k)$, can be calculated as

$$\tilde{x}_c(k) = \prod\nolimits_{j\in U_i} \tilde{x}_b(j) = \exp\left(\mathbf{g}_k(\mathbf{ln}\tilde{\mathbf{x}}_b)^T\right) \tag{59}$$

This proves Theorem 1.

B. *Proof of Theorem 2*

From Eqs. (25) and (26), the output SNR of SISO encoder is given by

$$\gamma_{sr,out} = \frac{\alpha_0^2}{\sigma_{out}^2} = \frac{1}{(1+\sigma_{in}^2/\alpha^2)^{n_0}-1} = \frac{1}{\left(1+\gamma_{sr,in}^{-1}\right)^{n_0}-1} \tag{60}$$

where $\gamma_{sr,in} = \alpha^2/\sigma_{in}^2$

We can observe from Eq. (60) that in order to maximize $\gamma_{sr,out}$, we need to maximize $\gamma_{SR,in}$.

It has been proved in [6] that the SSE is the SNR maximizing estimate of the source symbols. Thus, the SSE is the optimal input to the SISO encoder in terms of maximizing the SNR of SISO encoder output. This proves the Theorem 2.

C. *Proof of Theorem 4*

To prove the theorem, we need to use the following Lemma.

Lemma 2: Given the positive real numbers $v_1 > v_2 > 0$ and $\theta_1 > \theta_2 > 0$, the following relationship always holds,

$$\frac{1}{v_1+\theta_1} + \frac{1}{v_2+\theta_2} > \frac{1}{v_1+\theta_2} + \frac{1}{v_2+\theta_1} \tag{61}$$

The proof of the above result is straightforward and we omit it here. Now let us use the Lemma to prove Theorem 4.

Since

$$\gamma_{r_k d} = \gamma_{rd}$$

for all $k = 1, \ldots, K$, we can rewrite $\rho_k\left(d_k, \gamma_{rd}, \gamma_{sr_k,in}\right)$ as follows

$$\rho_k\left(d_k, \gamma_{rd}, \gamma_{sr_k,in}\right) = \frac{\gamma_{rd}\gamma_{sr_k,in}}{\gamma_{sr_k,in}d_k^{-1} + \gamma_{rd}} = \frac{1}{\left(d_k\gamma_{rd}\right)^{-1} + \left(\gamma_{sr_k,in}\right)^{-1}} = \frac{1}{(v_k+\theta_k)} \tag{62}$$

where $v_k = \left(d_k\gamma_{rd}\right)^{-1}$ and $\theta_k = \left(\gamma_{sr_k,in}\right)^{-1}$.

Let $v_{(1)}$, $v_{(2)}$, $\ldots$,$v_{(K)}$ and $\theta_{(1)}$, $\theta_{(2)}$, $\ldots$,$\theta_{(K)}$ represent the re-ordered values of v_1, v_2, $\ldots$,v_K and θ_1, θ_2, $\ldots$,θ_K. Then from Eqs. (40) and (41), we have

$$v_{(1)} \le v_{(2)} \cdots \le v_{(K)} \ and \ \theta_{(1)} \le \theta_{(2)} \cdots \le \theta_{(K)} \tag{63}$$

Now let us determine how to distribute $\{v_{(1)}, \cdots, v_{(K)}\}$ and $\{\theta_{(1)}, \cdots, \theta_{(K)}\}$ to form K pairs (v_k, θ_k), $k = 1, \ldots, K$, where any $v_{(i)}$ or $\theta_{(j)}$ can only be assigned to one and only one pair, so as to maximize $\sum\limits_{k=1}^{K} \rho_k \left(d_k, \gamma_{rd}, \gamma_{sr_k,in}\right)$. As can be seen from Eq. (62), this is equivalent to maximizing

$$\Sigma_K = \sum_{k=1}^{K} \frac{1}{v_k + \theta_k} = \sum_{k=1}^{K} f\left(v_k, \theta_k\right) \tag{64}$$

where $f\left(v_k, \theta_k\right) = \left(v_k + \theta_k\right)^{-1}$.

We assume that the optimal K pairs of for $k = 1, \ldots, K$, are $\left(v_{(1)}, \theta_{j_1}\right)$, $\left(v_{(2)}, \theta_{j_2}\right)$,. . ., $\left(v_{(K)}, \theta_{j_K}\right)$. Now we prove this theorem by contradiction. Assume that $\theta_{j_1}, \theta_{j_2}, \ldots, \theta_{j_K}$ do not exactly follow the relationship of $\theta_{j_1} \leq \theta_{j_2} \cdots \leq \theta_{j_K}$. Then there must exist at least two integers p, q, such that $\theta_{j_p} > \theta_{j_q}$ for $p < q$. Since $v_{(q)} \geq v_{(p)}$ and $\theta_{j_p} > \theta_{j_q}$, then by using the Lemma 1, we have

$$f\left(v_{(q)}, q_{j_p}\right) + f\left(v_{(p)}, \theta_{j_q}\right) > f\left(v_{(q)}, \theta_{j_q}\right) + f\left(v_{(p)}, \theta_{j_p}\right) \tag{65}$$

This means that when we switch θ_{j_q} and θ_{j_p} in the two pairs $\left(v_{(p)}, \theta_{j_p}\right)$ and $\left(v_{(q)}, \theta_{j_q}\right)$, leading to a new two pairs $\left(v_{(p)}, \theta_{j_q}\right)$ and $\left(v_{(q)}, \theta_{j_p}\right)$, while keeping other pairs unchanged, the resulted Σ_K will be larger. This contradicts that $\left(\mathbf{v}_{(1)}, \theta_{j_1}\right), \cdots, \left(v_{(K)}, \theta_{j_K}\right)$ are the optimal pairs achieving the maximum Σ_K. Therefore, the optimal pairs are $\left(v_{(1)}, \theta_{(1)}\right), \left(v_{(2)}, \theta_{(2)}\right), \cdots, \left(v_{(K)}, \theta_{(K)}\right)$. This proves Theorem 4.

REFERENCES

[1] J. N. Laneman, D. N. C. Tse and G. W. Wornell, ”Cooperative diversity in wireless networks: efficient protocols and outage behavior,” IEEE Trans. IT, vol. 50, pp. 3062-2080, Dec. 2004.

[2] G. Kramer, M. Gastpar, and P. Gupta, ”Cooperative strategies and capacity theorems for relay networks,” IEEE Trans. IT, vol. 51, pp. 3037-3063, Sept. 2005.

[3] T. M. Cover and A. A. El Gamal, ”Capacity theorems for the relay channel,” IEEE Trans. Inform. Theory, vol. 25, pp. 572-584, Sept. 1979.

[4] H. H. Sneessens and L. Vandendorpe, ’Soft decode and forward improves cooperative communications,’ Proc of 6th IEE International Conference in 3G and Beyond, pp. 1-4, Nov. 7-9, 2005, London, November 2005.

[5] X. Bao and J. Li, ’Efficient message relaying for wireless user cooperation: decode-amplify-forward (DF) and hybrid DF and coded-cooperation,’ IEEE Trans Wireless Commun., vol. 6, pp. 3975-3984, Nov. 2007.

[6] K. S. Gomadam and S. A. Jafar, ’Optimal relay functionality for SNR maximization in memoryless relay networks,’ IEEE JSAC, vol. 25, pp. 390-401, Feb. 2007.

[7] P. Weitkemper, D. Wbben, V. Khn, K.-D. Kammeyer, ’Soft information relaying for wireless networks with error-prone source-relay link,’ Proc. Int. ITG Conf. on Source and Channel Coding, Ulm, Germany, Jan. 2008.

[8] Y. Li, B. Vucetic, T. F. Wong, and M. Dohler, ’Distributed turbo coding with soft information relaying in multihop relay networks,’ IEEE JSAC, vol. 24, pp. 2040-2050, Nov. 2006.

[9] Y. Li and B. Vucetic, ”On the performance of a simple adaptive relaying protocol for wireless relay networks,” Proc of VTC Spring 2008, Singapore, May 2008.

[10] L. Lampe, R. Schober, and S. Yiu, ”Distributed space-time coding for multihop transmission in power line communication networks” IEEE JSAC, vol. 24, no. 7, pp. 1389 - 1400, July 2006.

[11] Y. Jing and B. Hassibi, “Distributed space-time coding in wireless relay networks,” IEEE Trans. on Wireless Communications, vol. 5, pp. 3524-3536, Dec. 2006.

[12] Y. Li and X. G. Xia, ”A family of distributed space-time trellis codes with asynchronous cooperative diversity,” Proc of IPSN 2005, Los Angeles, California, pp. 340 - 347, April 2005.

[13] J. Yuan, Z. Chen Y. Li, and L. Chu, ”Distributed space-time trellis codes for a cooperative system,” IEEE Trans. on Wireless Communications, vol. 8, pp. 4897-4905, Aug 2009.

[14] A. Chakrabarti, A. Baynast, A. Sabharwal, and B. Aazhang, B., ”Low density parity check codes for the relay channel,” IEEE JSAC, vol. 25, no.2, pp.280 - 291, Feb 2007.

[15] H. Jun and T. Duman, ”Low density parity check codes over wireless relay channels,” IEEE Trans. Wireless Commun., vol. 6, no.9, pp. 3384 - 3394, Sept. 2007.

[16] B. Zhao and M. C. Valenti, ”Distributed turbo coded diversity for relay channel,” Electron. Lett., vol. 39, no. 10, pp. 786-787, May 2003.

[17] M. Janani, A. Hedayat, T. Hunter, A. Nosratinia, ”Coded cooperation in wireless communications: space-time transmission and iterative decoding,” IEEE Trans. Signal Processing, vol. 52, pp.362 - 371, Feb. 2004.

[18] P. Razaghi and W. Y ”Bilayer low-density parity-check codes for decode-and-forward in relay channels”, IEEE Trans. IT, vol. 53, no. 10, pp. 3723-3739, Oct. 2007.

[19] J. Hagenauer, E. Offer, and L. Papke, ”Iterative decoding of binary block and convolutional codes,” IEEE Trans. IT, vol. 42, no. 2, pp. 429-445, March 1996.

[20] K. J. Larsen, ”Short convolutional codes with maximal free distance for rate 1/2, 1/3, and 1/4,” IEEE Trans. IT, vol. 19, pp. 371-372, May 1973.

[21] M. Dohler and Y. Li, Cooperative communications: hardware, channel and PHY, John Wiley 2010.

[22] S. Lin and D. J. Costello, Error control coding, NJ: prentice hall, second ed., 2004.

[23] A. Winkelbauer and G. Matz ”On Efficient Soft-Input Soft-Output Encoding of Convolutional Codes,” in Proc. IEEE International Conference on Acoustics, Speech and Signal Processing 2011, pages 3132 - 3135, Prague (Czech Republic), May, 2011.

[24] Mehdi Molu and N. Görtz, ”A Study on Relaying Soft Information with Error Prone Relays,” in Proc. Proceedings Forty-Ninth Annual Allerton Conference on Communication, Urbana Champain, Illinios, USA, September, 2011.

[25] T. Volkhausen, Dereje H. Woldegebreal, and H. Karl, ”Improving Network Coded Cooperation by Soft Information,” In Proc. IEEE International Workshop on Wireless Network Coding (WiNC2009), Jun. 2009.

[26] Y. Peng, M.i Wu, H. Zhao, W. Wang, ”Cooperative network coding with soft information relaying in two-way relay channels,” Journal of communications, vol. 4, no. 11, pp.849-855, Dec. 2009.

[27] W. Pu, C. Luo, S. Li, and C. W. Chen, ”Continuous network coding in wireless relay networks,” in Proc. IEEE INFOCOM2008, pp. 2198-2206.

[28] F. Hu and J. Lilleberg, ”Novel Soft Symbol Estimate and Forward Scheme in Cooperative Relaying Networks,” in Proc. of IEEE Personal, Indoor, Mobile Radio Commun., 2009

TABLE I

COMPARISON OF EXACT MHD AND MHD BOUND IN THEOREM 3 FOR RATE 1/2, 1/3 AND 1/4 CODES, WHERE THE GENERATOR POLYNOMIAL ARE GIVEN IN OCTAL FORM

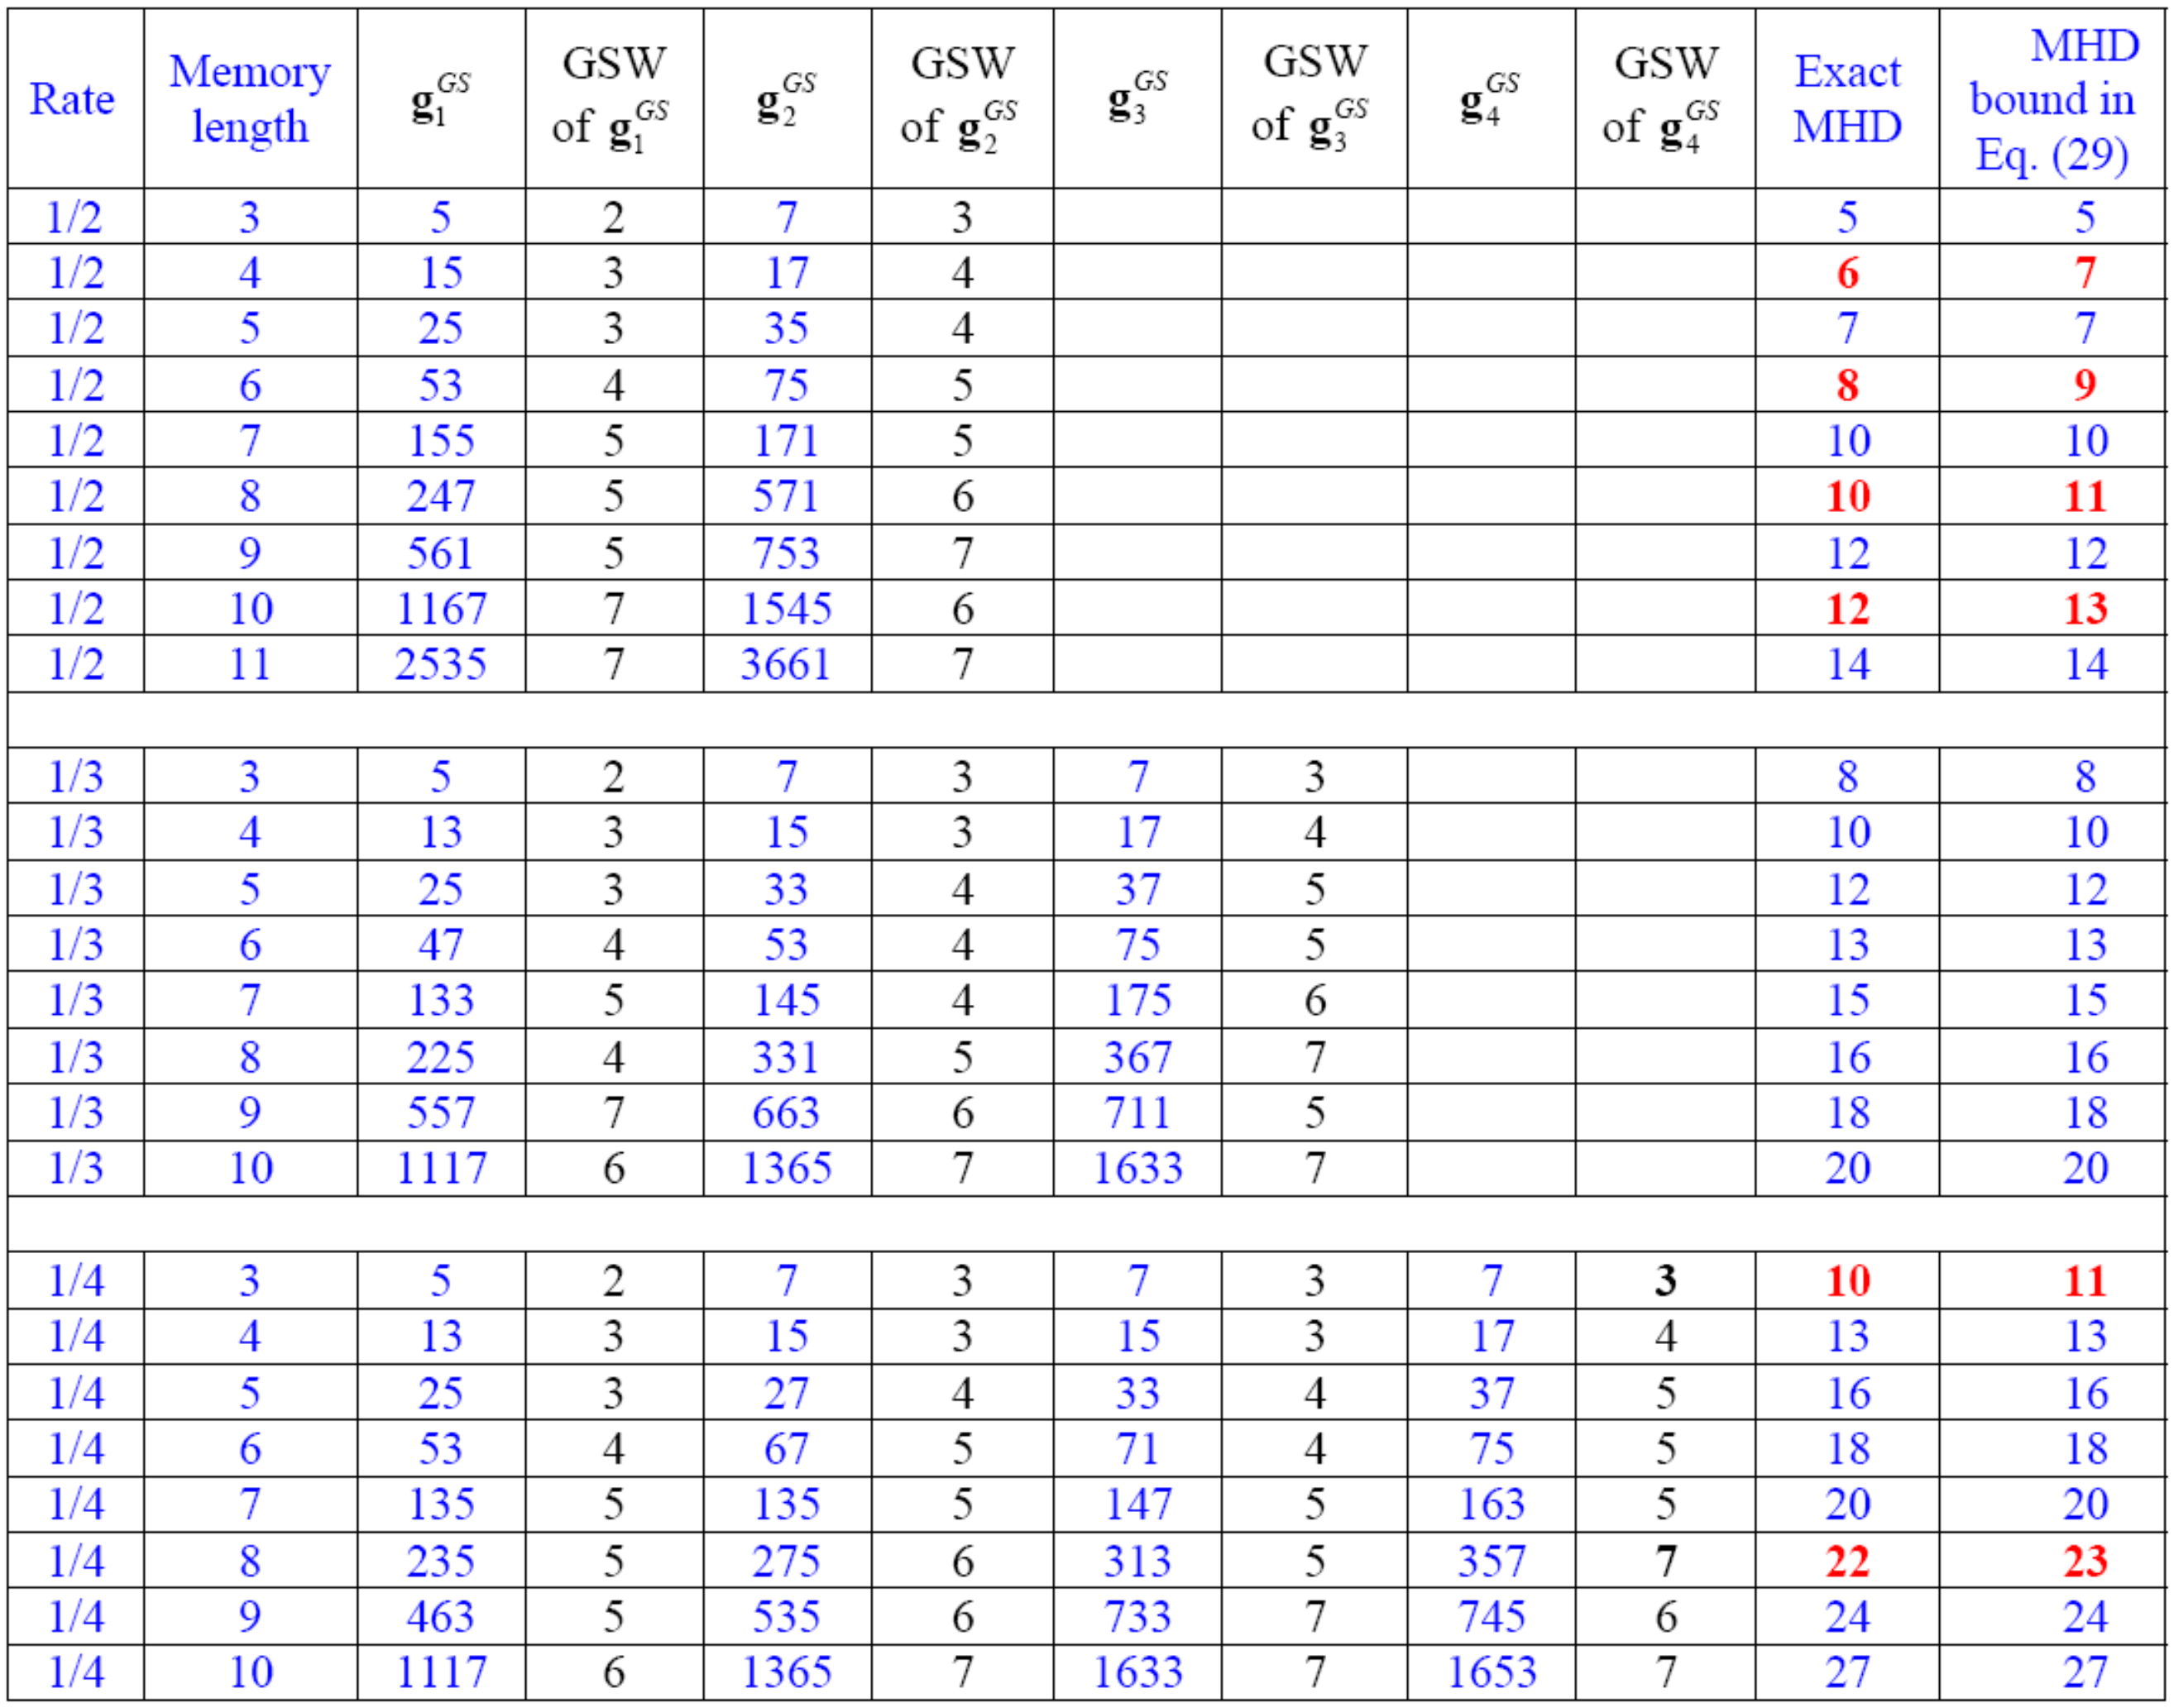

Rate	Memory length	$\mathbf{g}_1^{GS}$	GSW of $\mathbf{g}_1^{GS}$	$\mathbf{g}_2^{GS}$	GSW of $\mathbf{g}_2^{GS}$	$\mathbf{g}_3^{GS}$	GSW of $\mathbf{g}_3^{GS}$	$\mathbf{g}_4^{GS}$	GSW of $\mathbf{g}_4^{GS}$	Exact MHD	MHD bound in Eq. (29)
1/2	3	5	2	7	3					5	5
1/2	4	15	3	17	4					**6**	**7**
1/2	5	25	3	35	4					7	7
1/2	6	53	4	75	5					**8**	**9**
1/2	7	155	5	171	5					10	10
1/2	8	247	5	571	6					**10**	**11**
1/2	9	561	5	753	7					12	12
1/2	10	1167	7	1545	6					**12**	**13**
1/2	11	2535	7	3661	7					14	14
1/3	3	5	2	7	3	7	3			8	8
1/3	4	13	3	15	3	17	4			10	10
1/3	5	25	3	33	4	37	5			12	12
1/3	6	47	4	53	4	75	5			13	13
1/3	7	133	5	145	4	175	6			15	15
1/3	8	225	4	331	5	367	7			16	16
1/3	9	557	7	663	6	711	5			18	18
1/3	10	1117	6	1365	7	1633	7			20	20
1/4	3	5	2	7	3	7	3	7	**3**	**10**	**11**
1/4	4	13	3	15	3	15	3	17	4	13	13
1/4	5	25	3	27	4	33	4	37	5	16	16
1/4	6	53	4	67	5	71	4	75	5	18	18
1/4	7	135	5	135	5	147	5	163	5	20	20
1/4	8	235	5	275	6	313	5	357	**7**	**22**	**23**
1/4	9	463	5	535	6	733	7	745	6	24	24
1/4	10	1117	6	1365	7	1633	7	1653	7	27	27

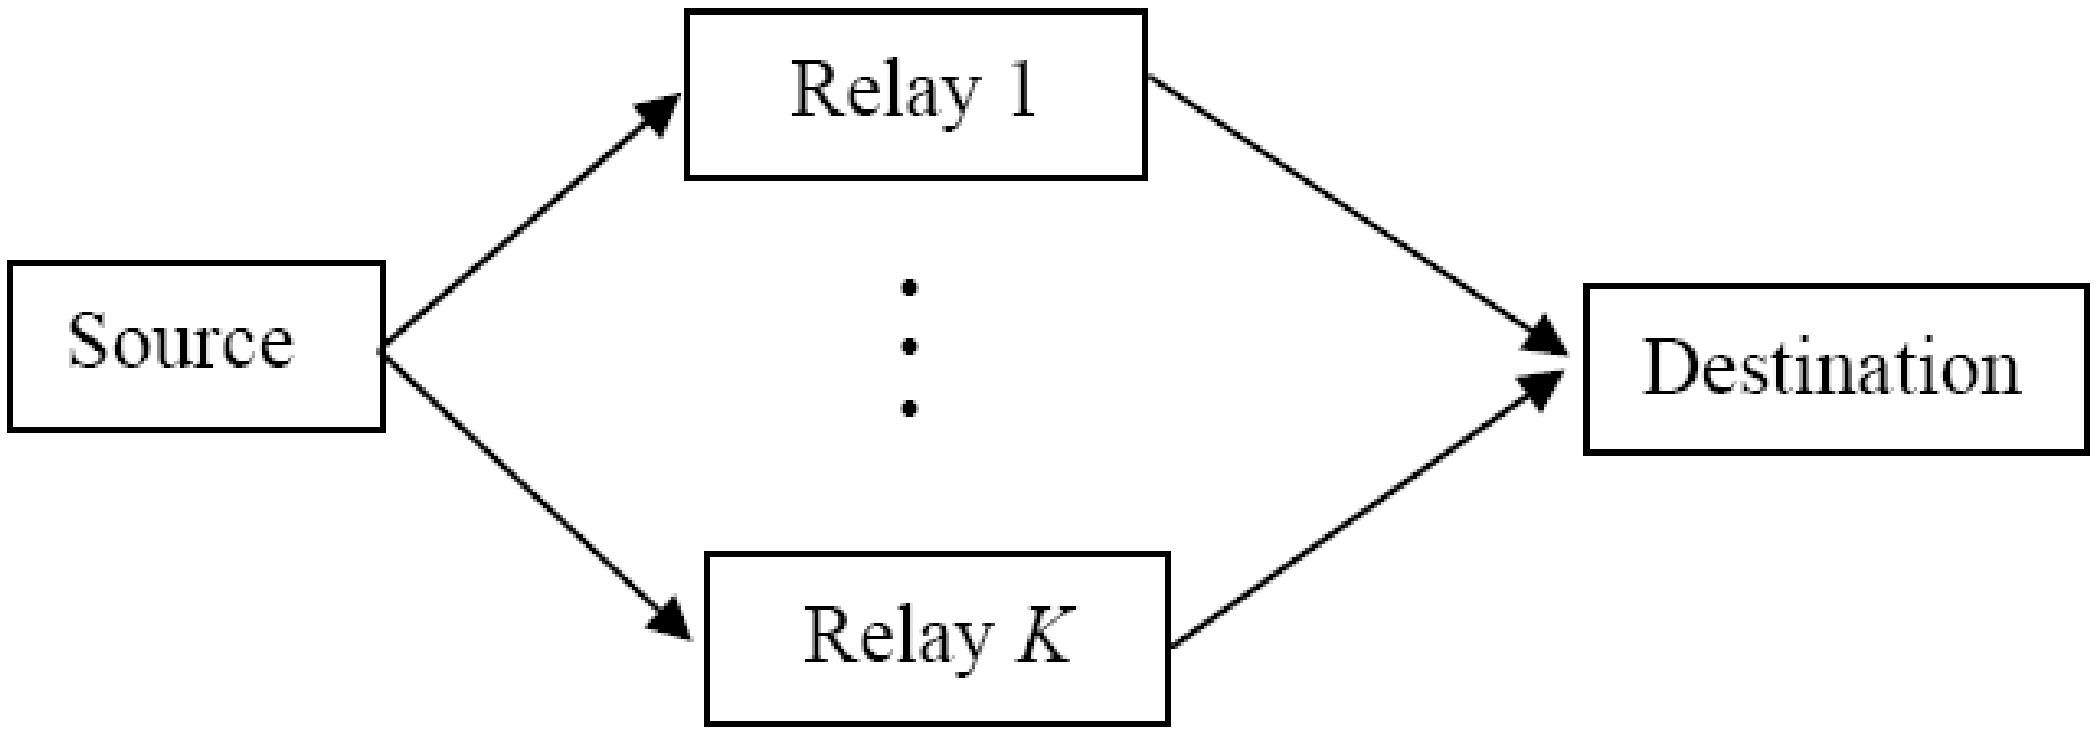

Fig. 1. The block diagram of a 2-hop relay system

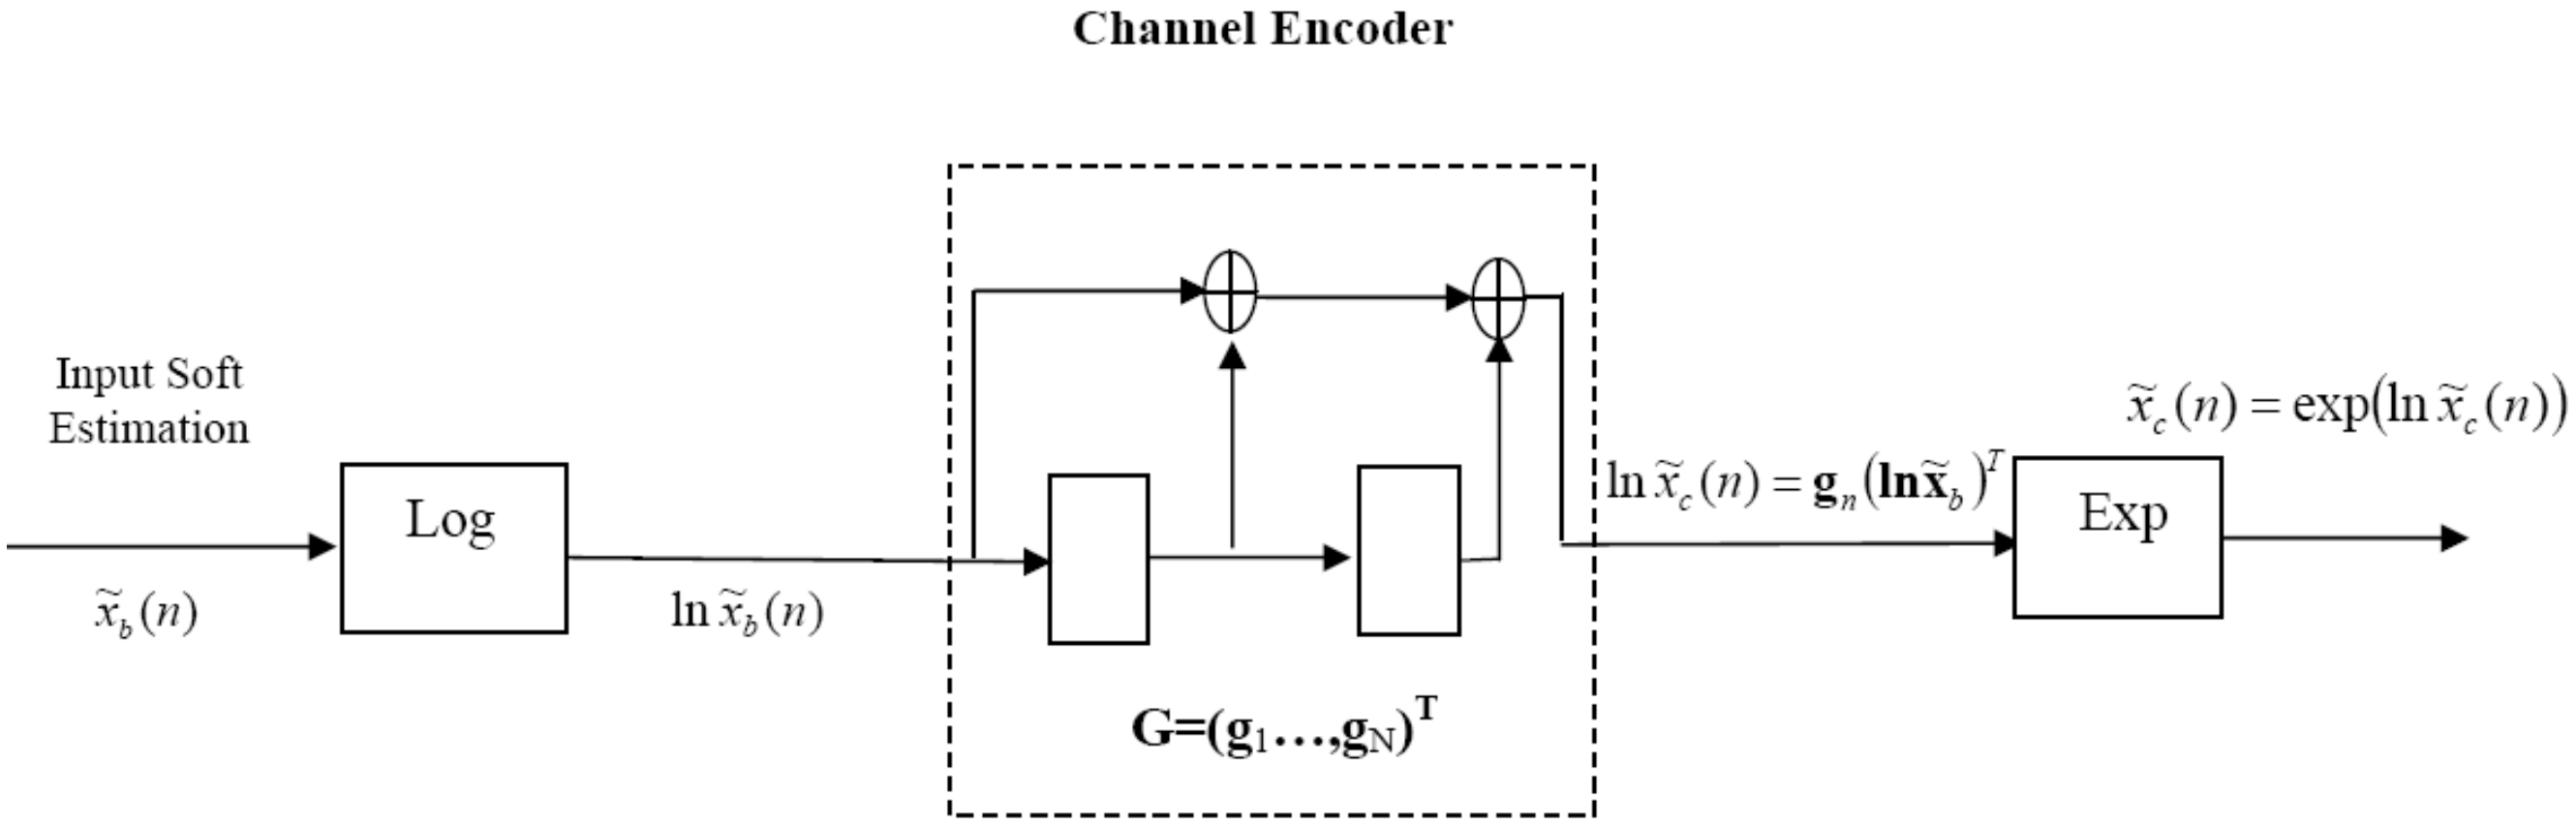
Channel Encoder
Input Soft Estimation
$\tilde{x}_b(n)$
Log
$\ln \tilde{x}_b(n)$
$\mathbf{G}=(\mathbf{g}_1\ldots,\mathbf{g}_N)^T$
$\ln \tilde{x}_c(n) = \mathbf{g}_n(\ln \tilde{\mathbf{x}}_b)^T$
Exp
$\tilde{x}_c(n) = \exp(\ln \tilde{x}_c(n))$

Fig. 2. SISO channel encoder of Example 1, where the addition is done in the complex field

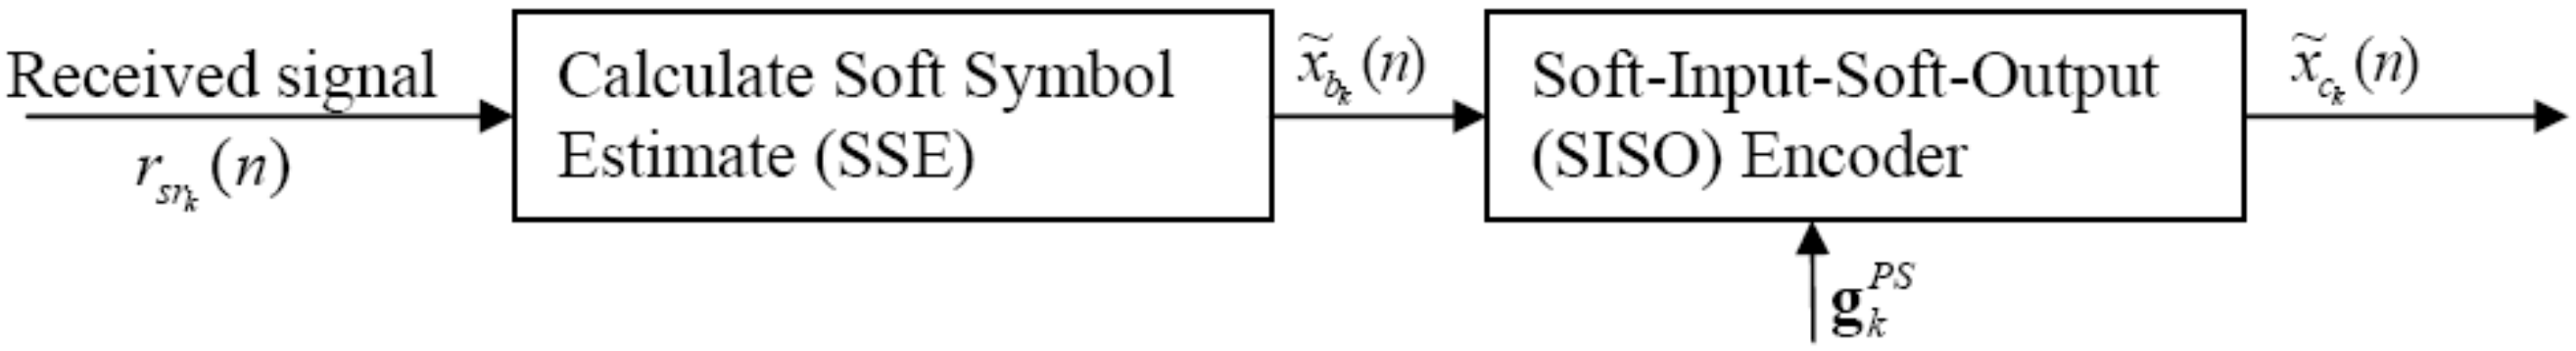

Fig. 3. The encoder structure at relay k in DISC

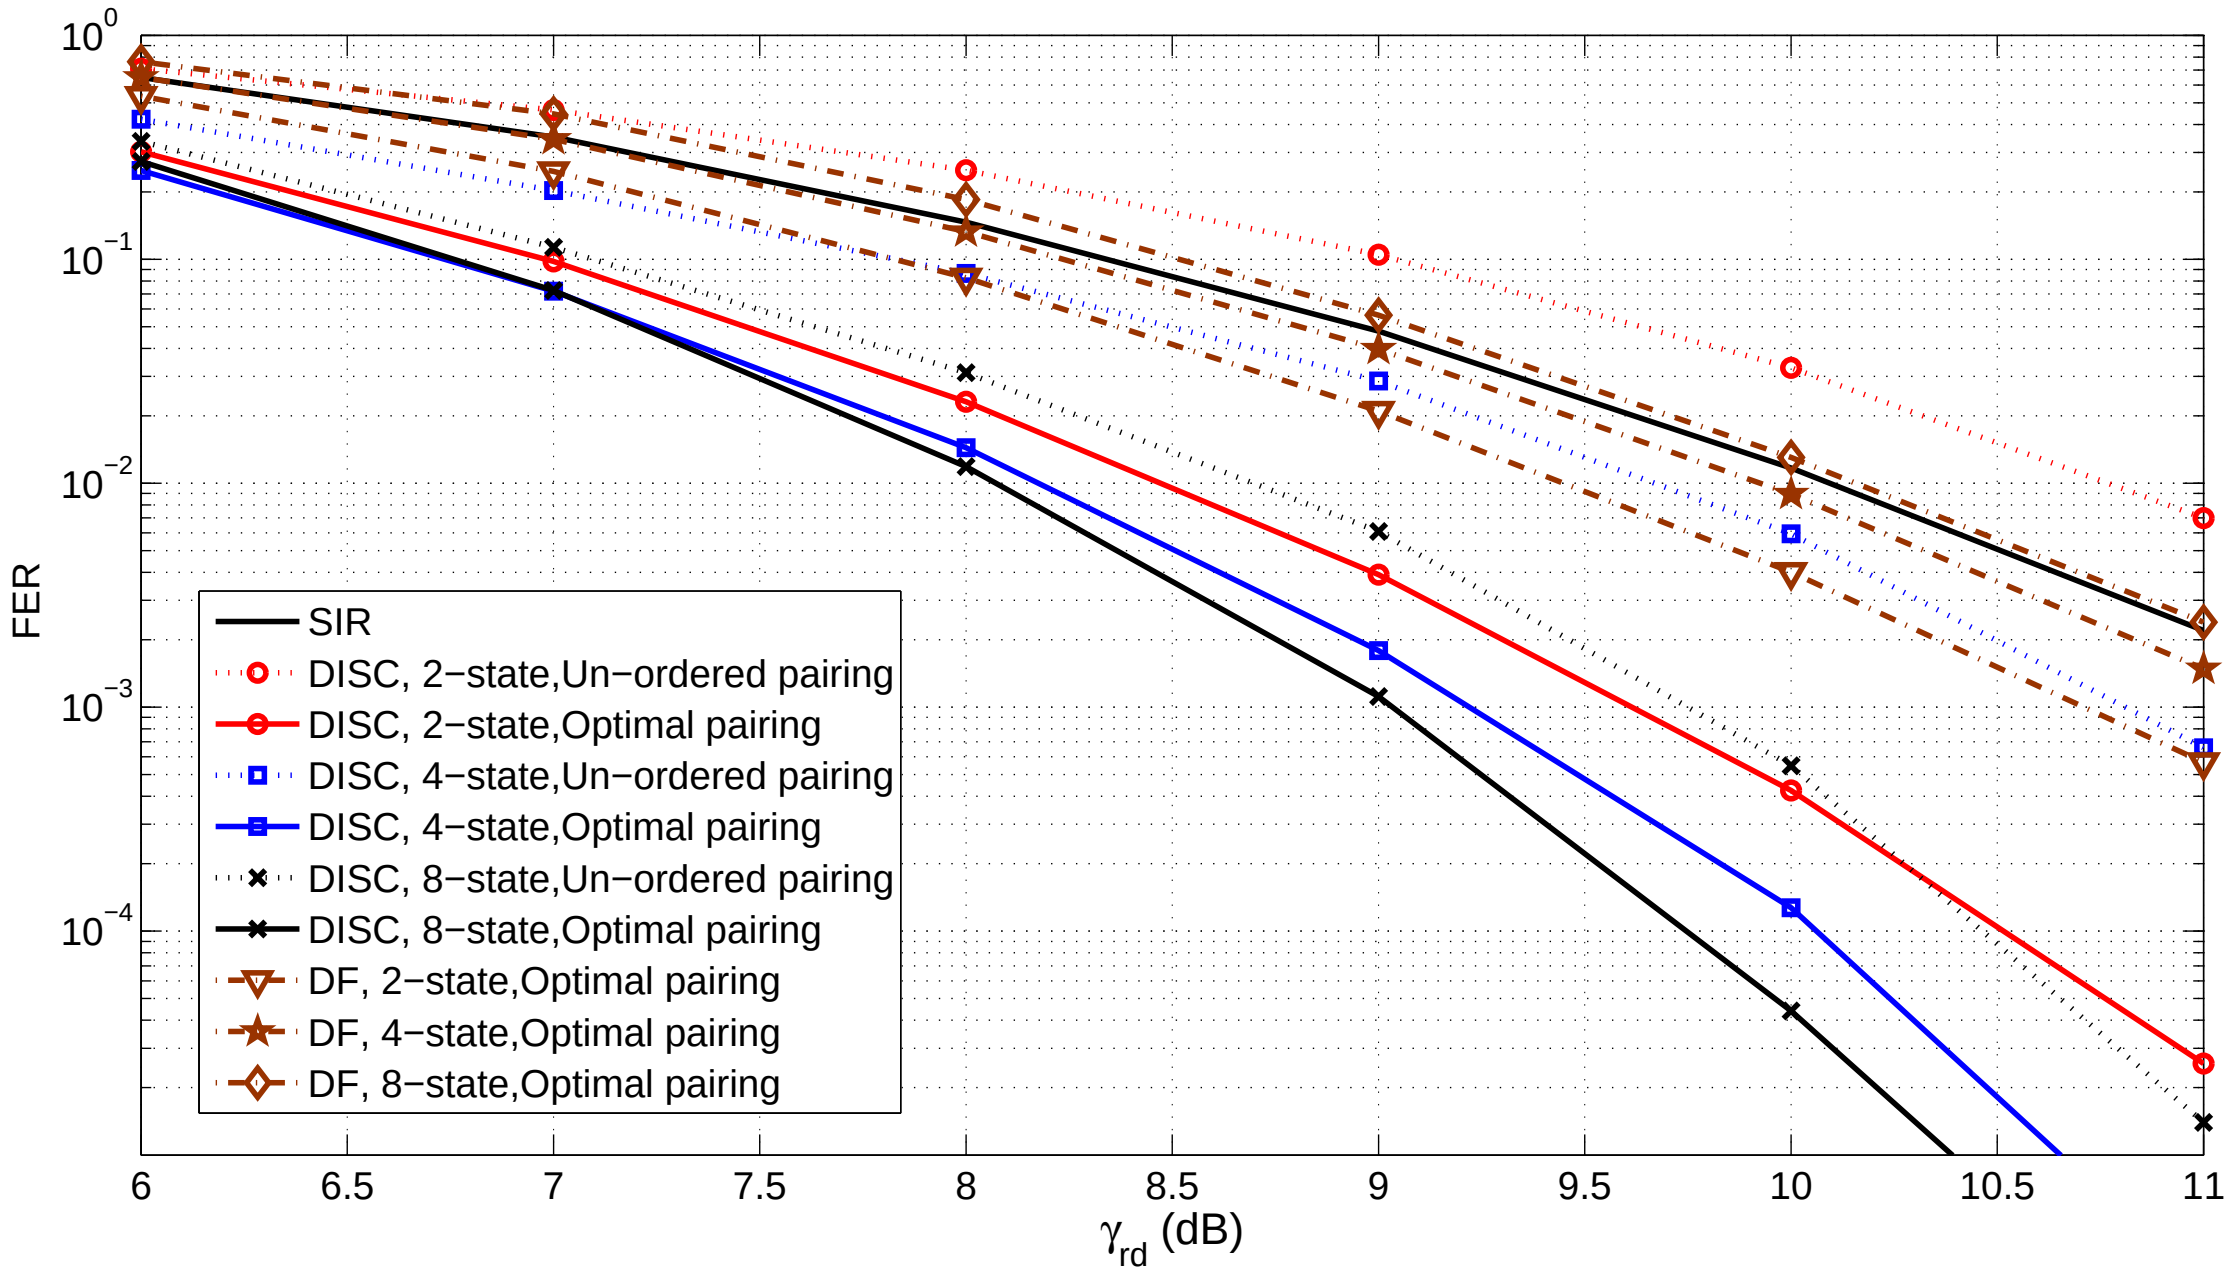

Fig. 4. FER for 2 relays in AWGN Channels, $\bar{\gamma}_{sr} = \bar{\gamma}_{sr_1} = \bar{\gamma}_{sr_2} - 3dB$, $\bar{\gamma}_{sr} = \bar{\gamma}_{rd}$

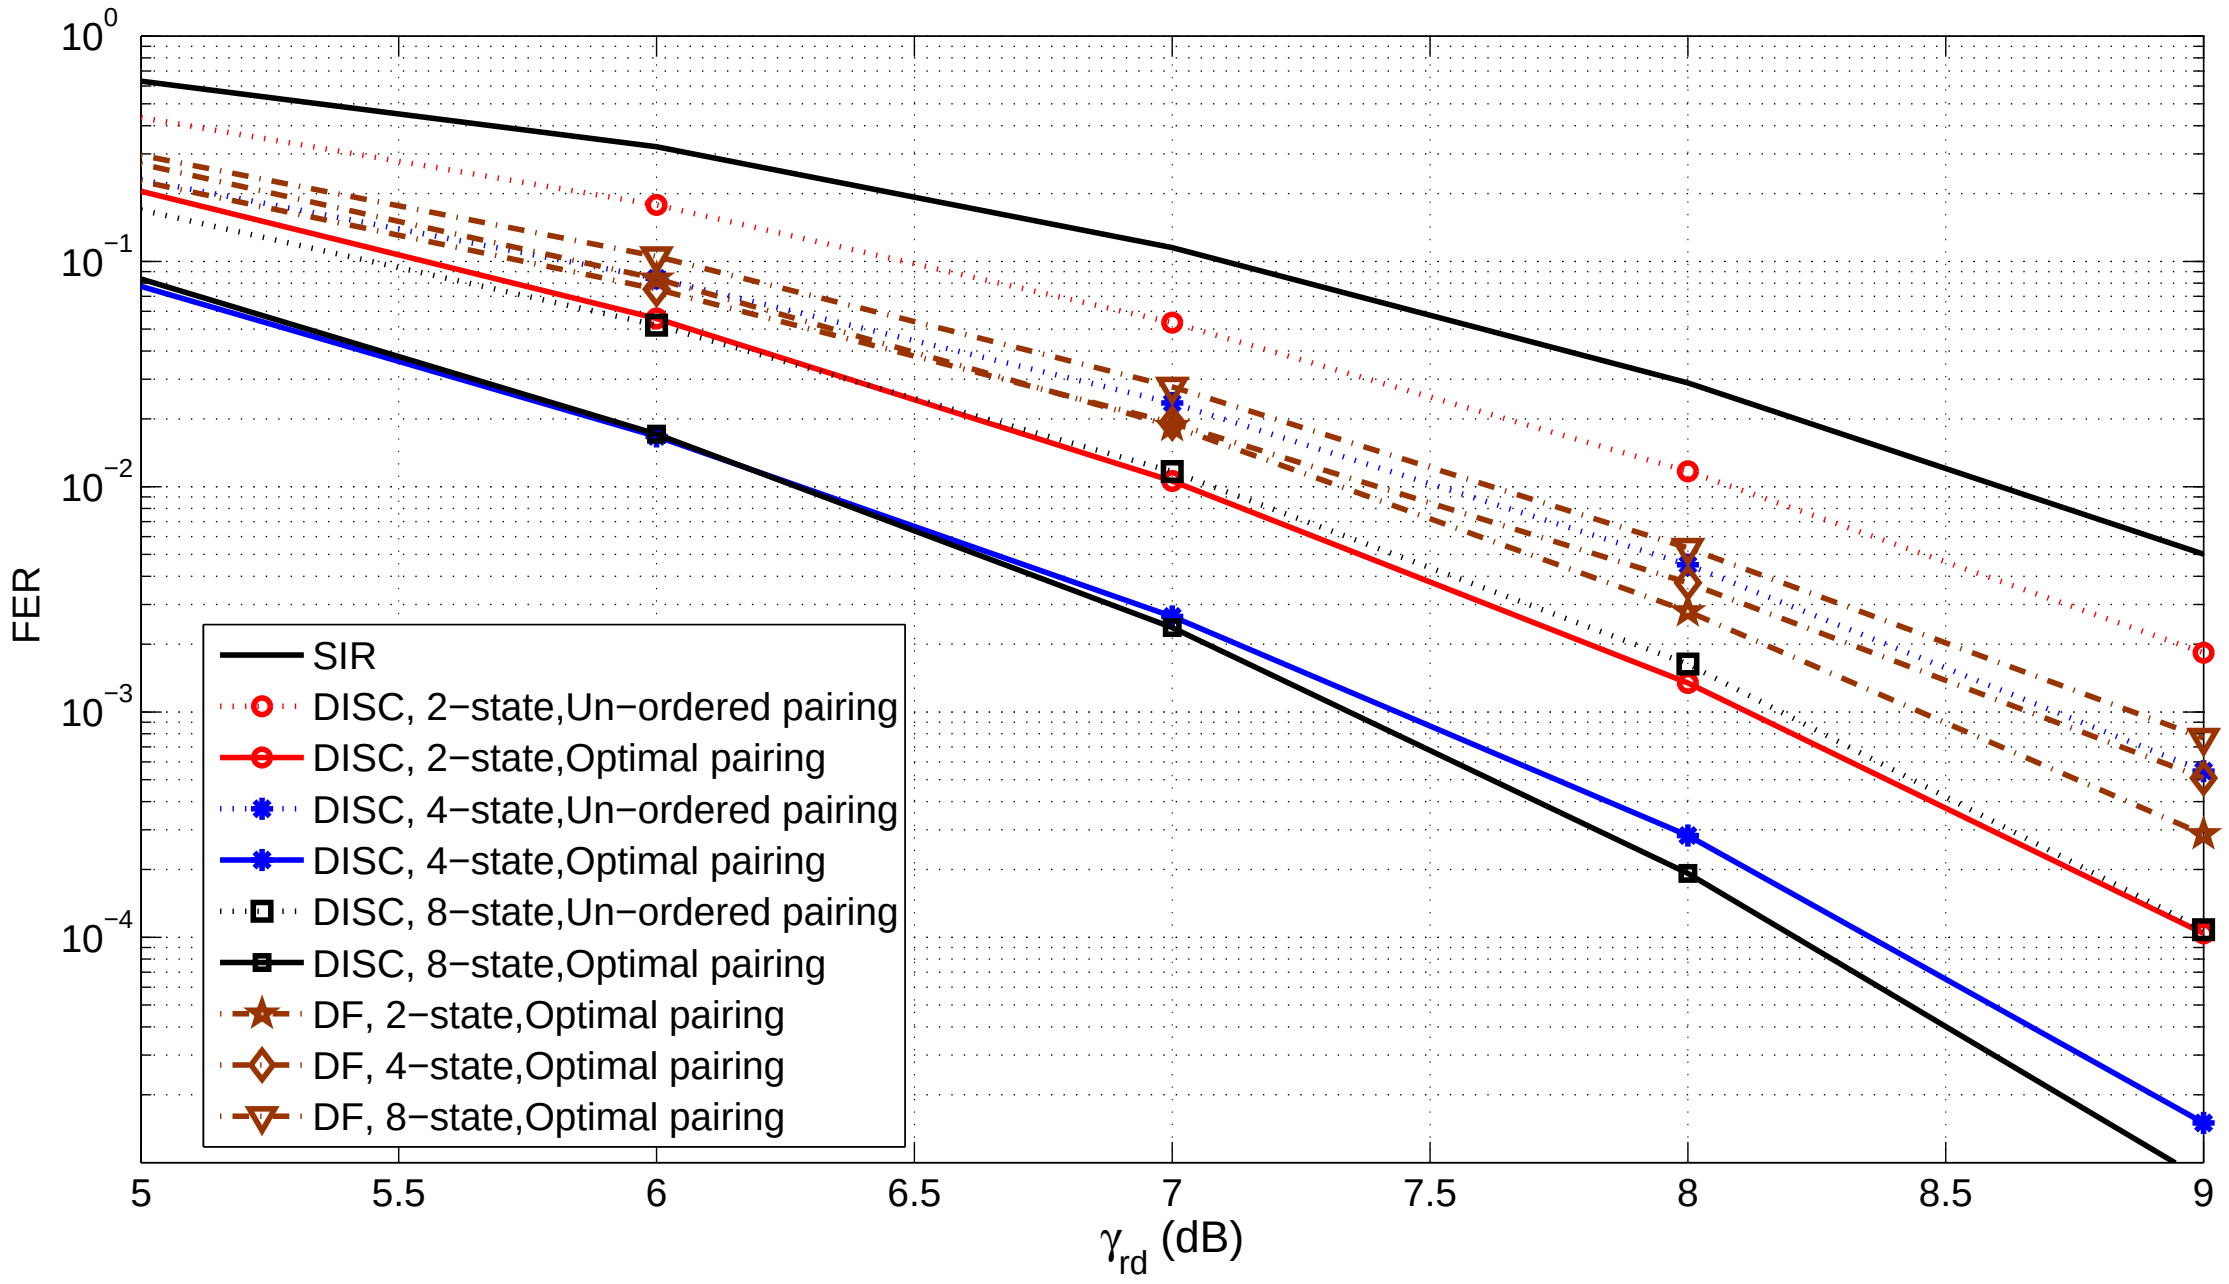

Fig. 5. FER for 2 relays in AWGN channels, $\bar{\gamma}_{sr} = \bar{\gamma}_{sr_1} = \bar{\gamma}_{sr_2} - 3dB$, $\bar{\gamma}_{sr} = \bar{\gamma}_{rd} + 3dB$

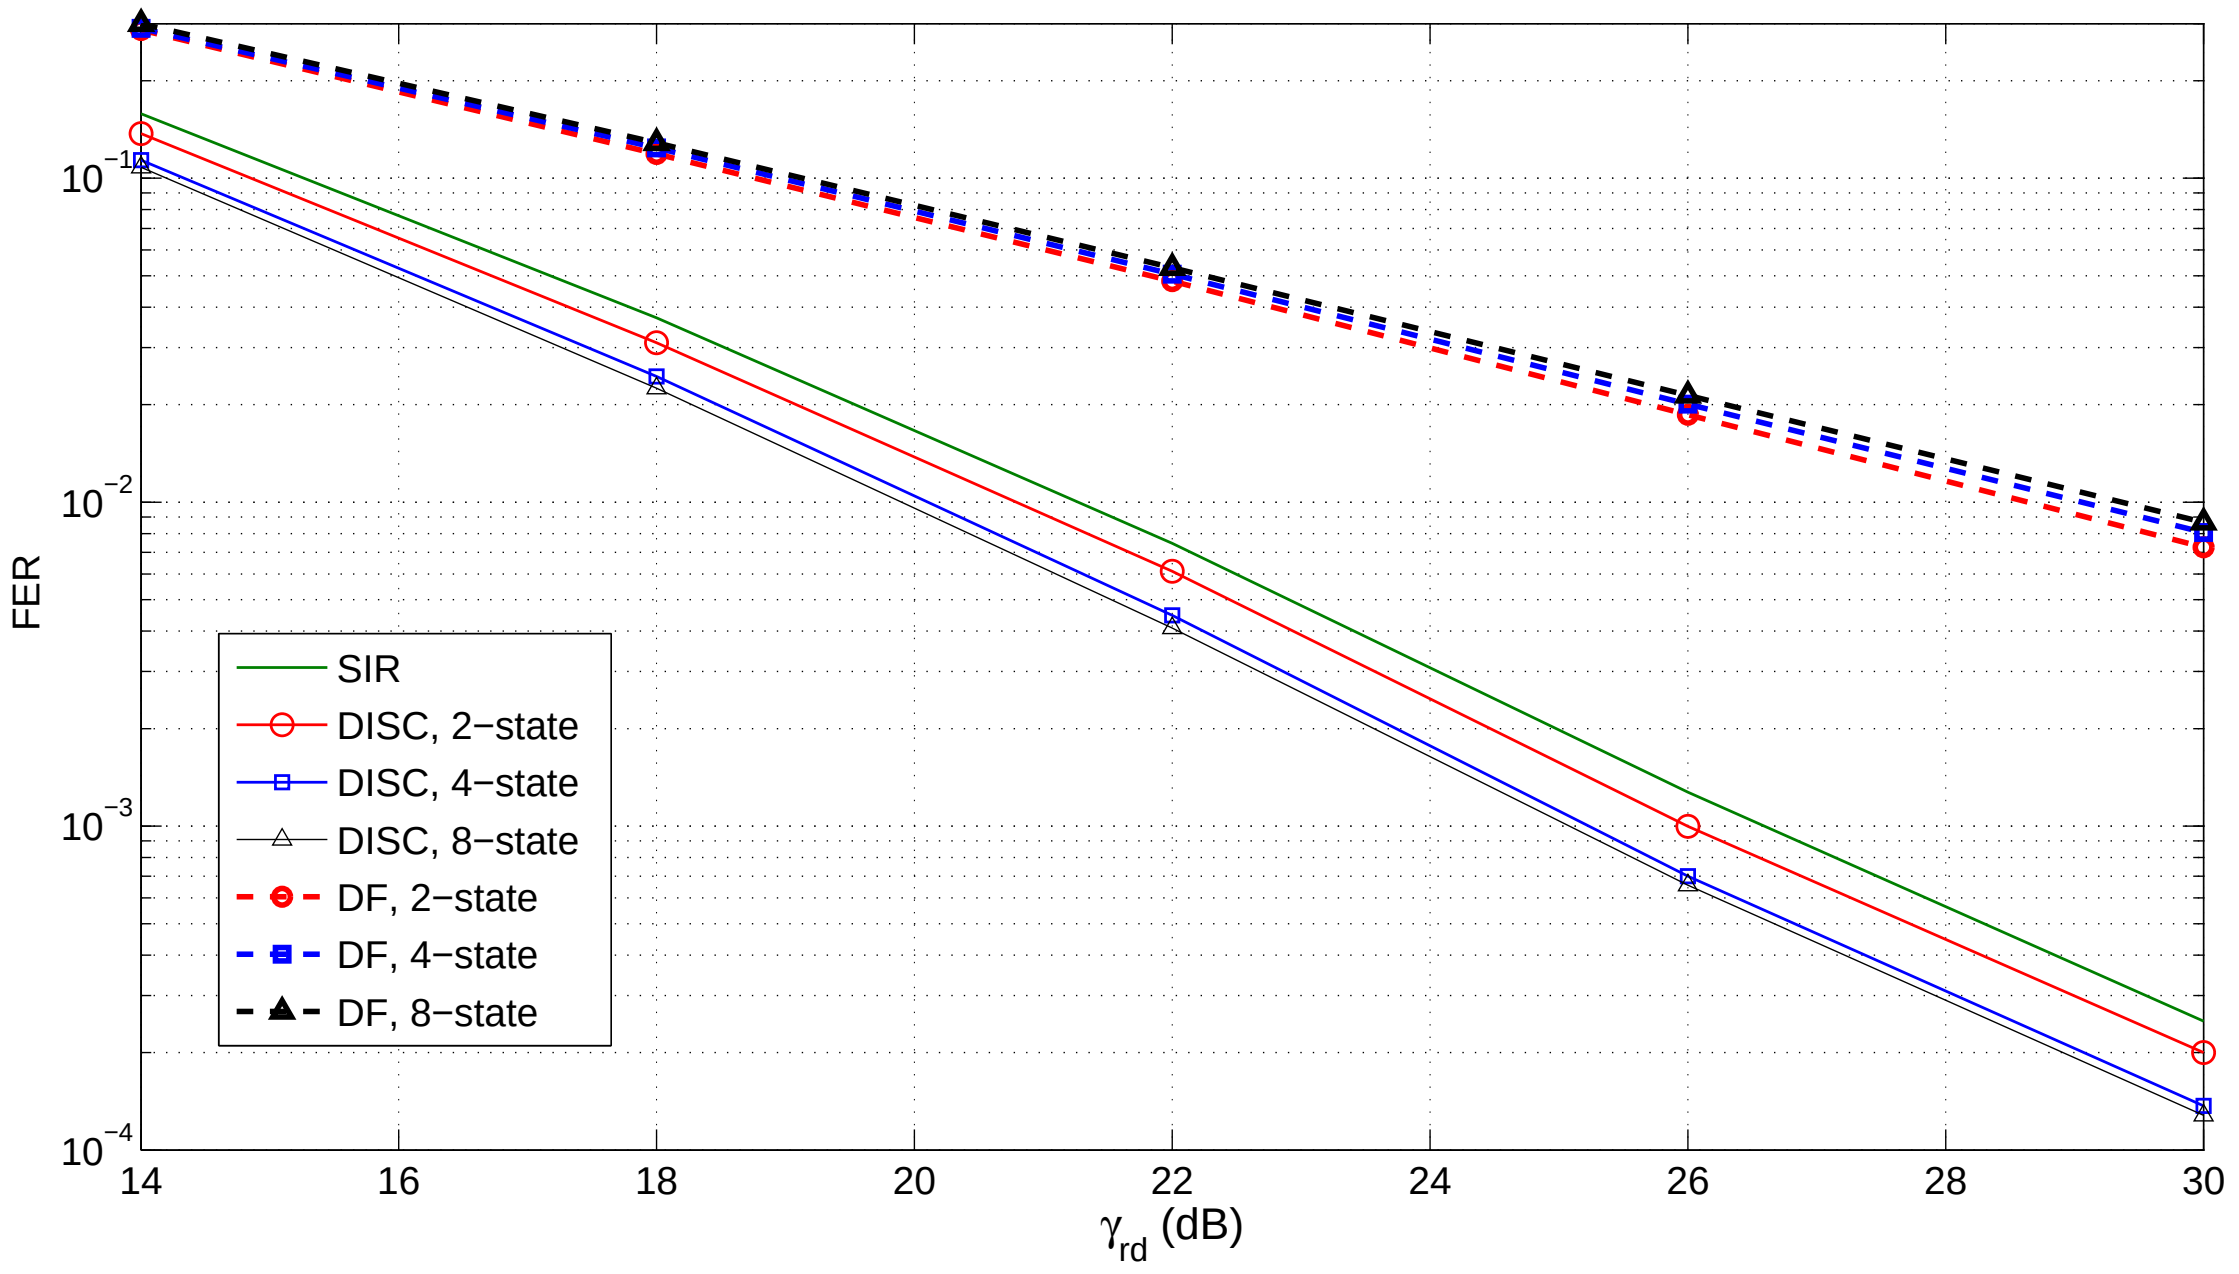

Fig. 6. FER for 2 relays in fading channels, $\bar{\gamma}_{sr} = \bar{\gamma}_{sr_1} = \bar{\gamma}_{sr_2}$, $\bar{\gamma}_{sr} = \bar{\gamma}_{rd}$

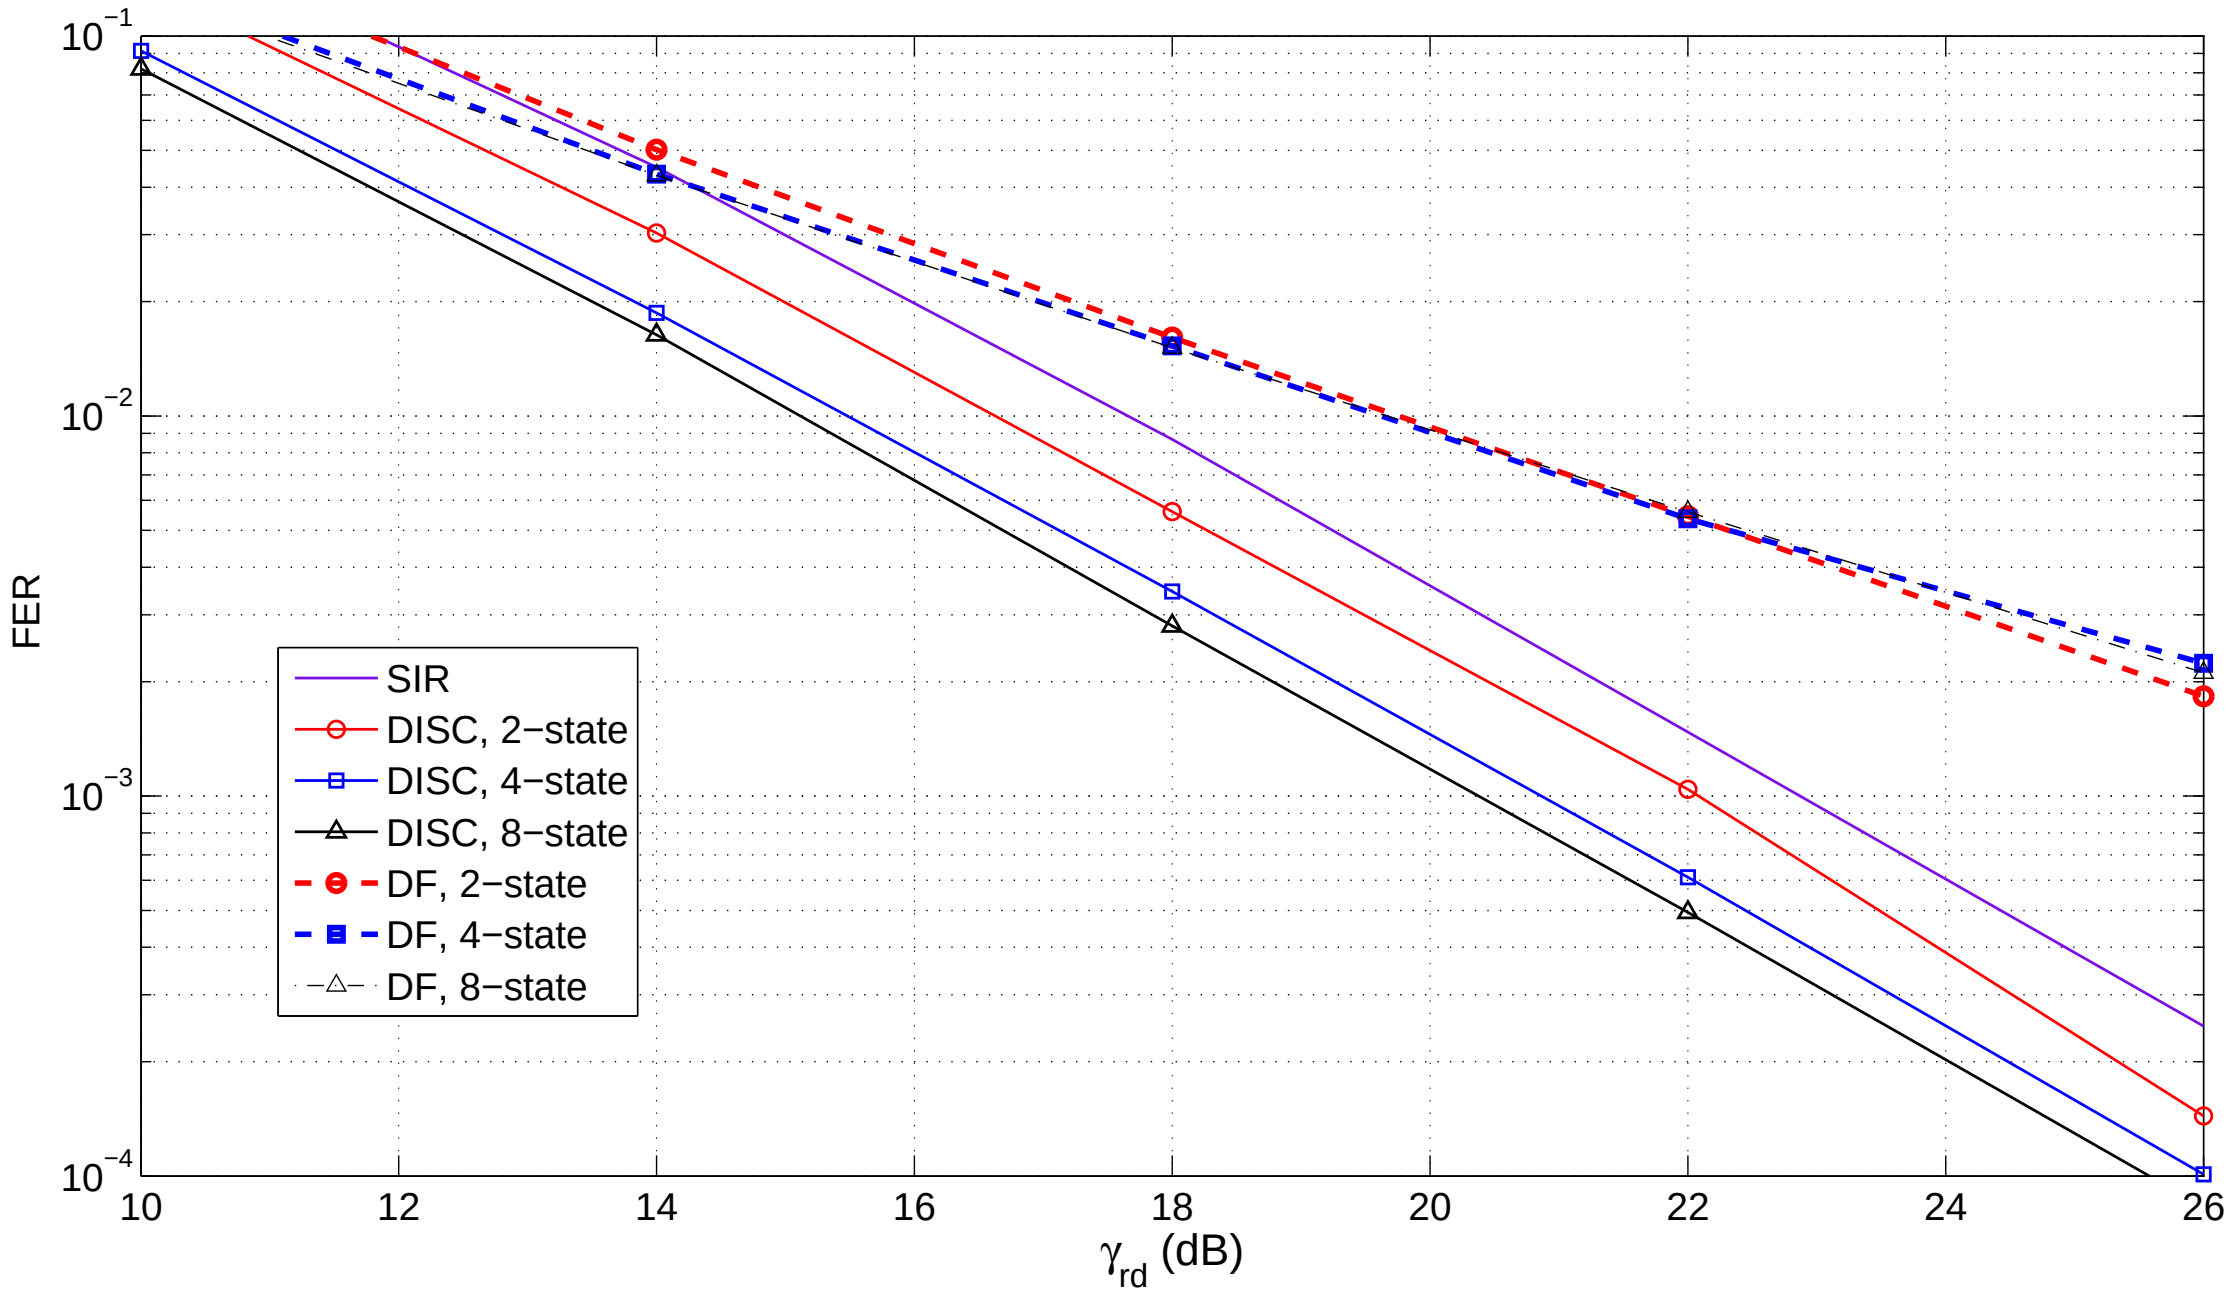

Fig. 7. FER for 2 relays in fading channels, $\bar{\gamma}_{sr} = \bar{\gamma}_{sr_1} = \bar{\gamma}_{sr_2}, \bar{\gamma}_{sr} = \bar{\gamma}_{rd} + 10dB$

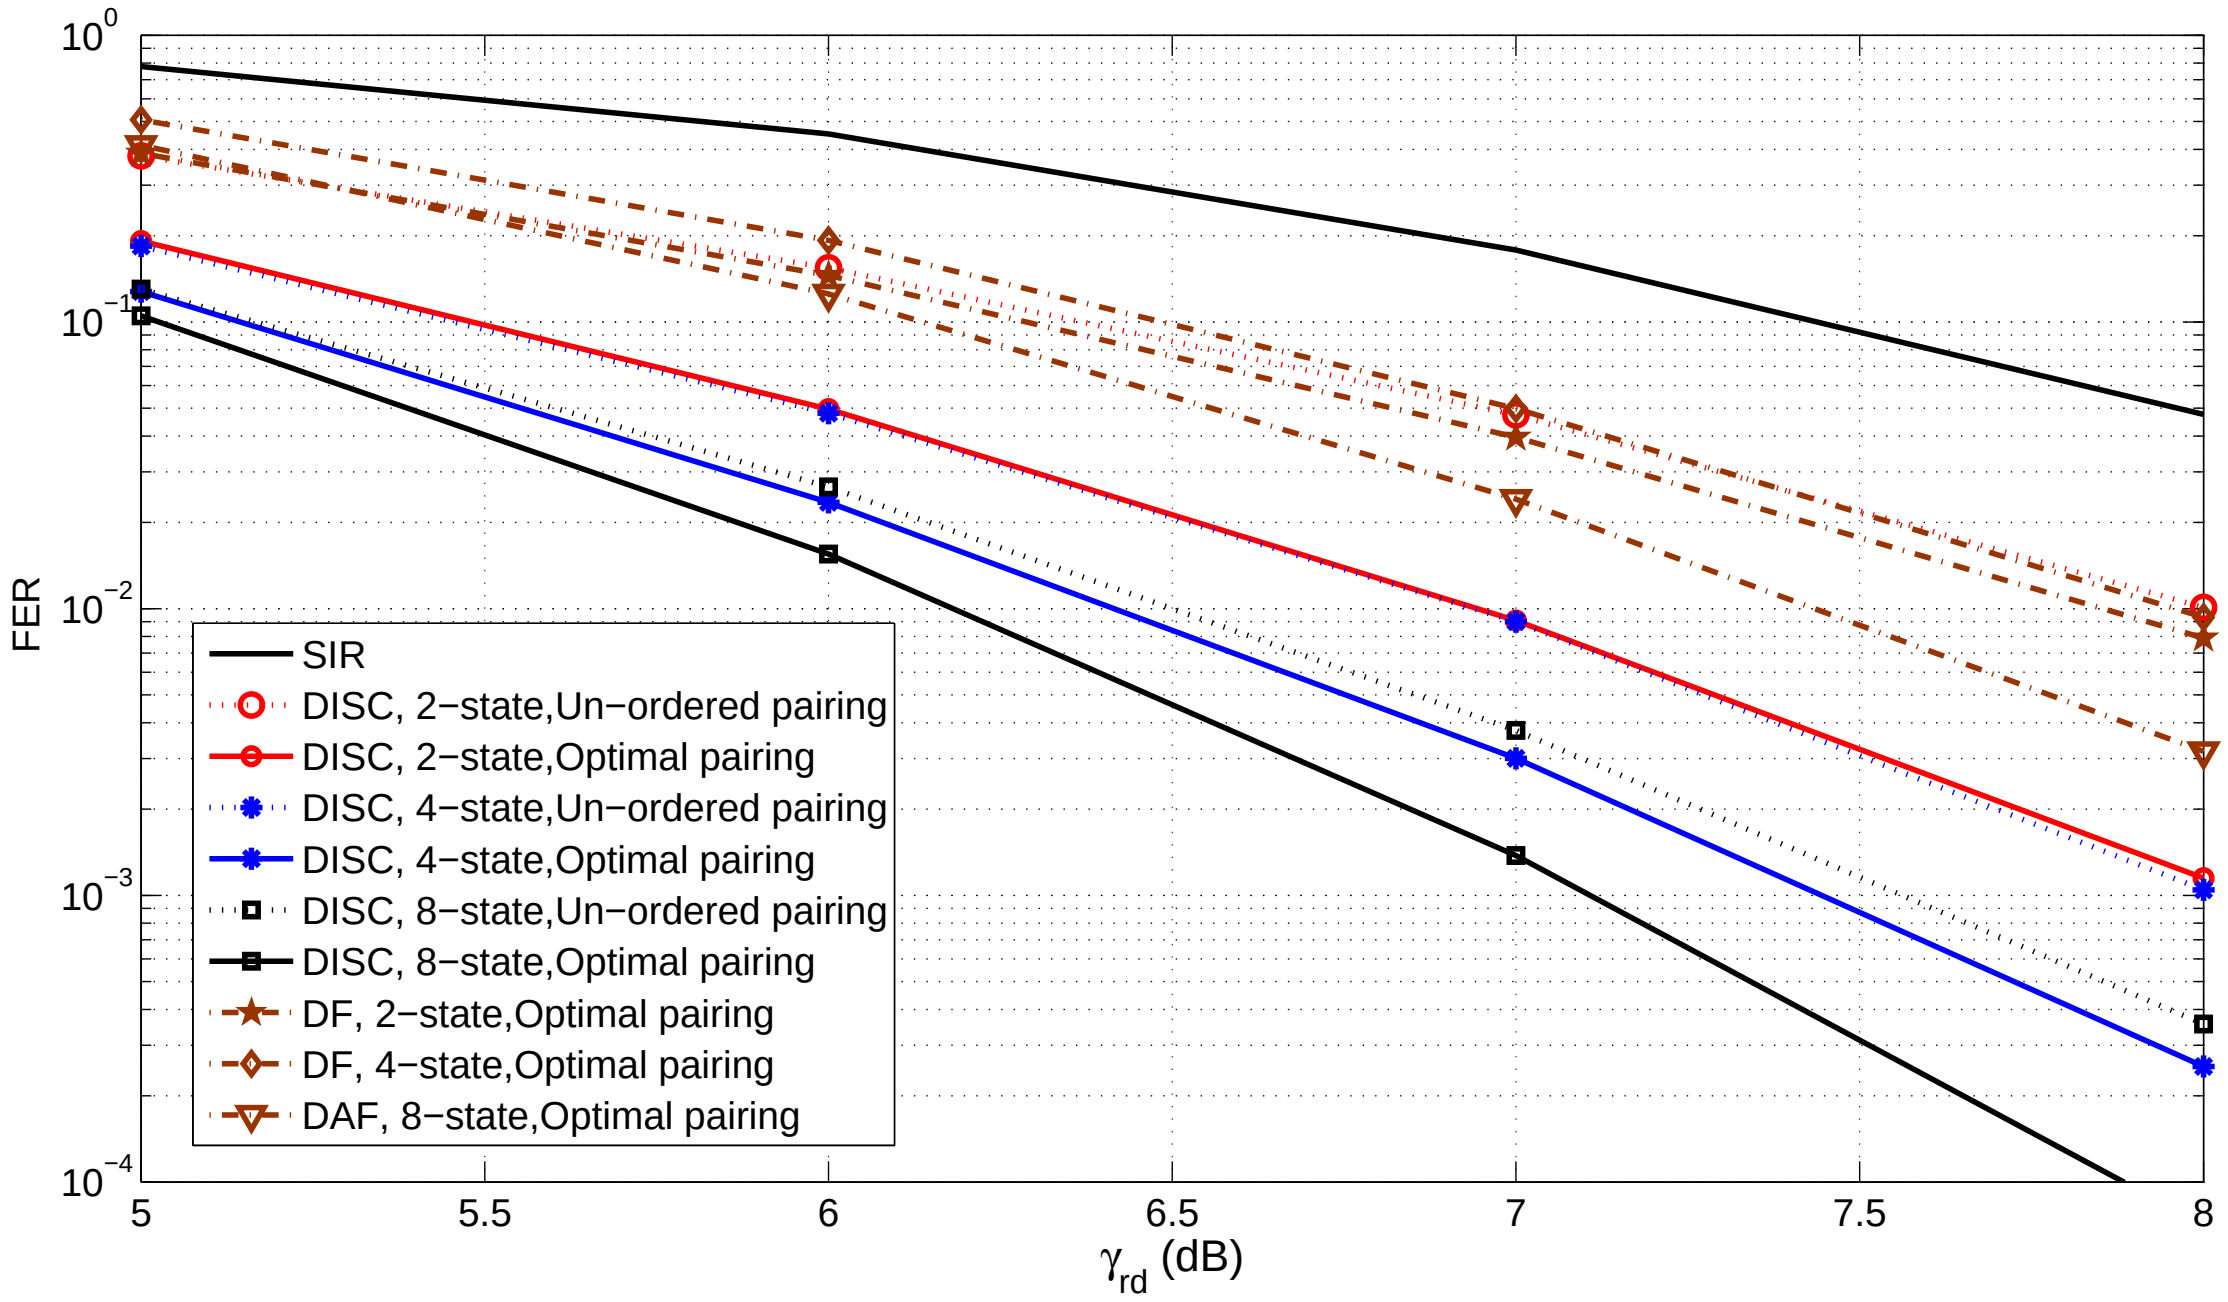

Fig. 8. FER for 3 relays in AWGN Channels, $\bar{\gamma}_{sr} = \bar{\gamma}_{sr_1} = \bar{\gamma}_{sr_2} - 2dB = \bar{\gamma}_{sr_3} - 4dB$, $\bar{\gamma}_{sr} = \bar{\gamma}_{rd}$

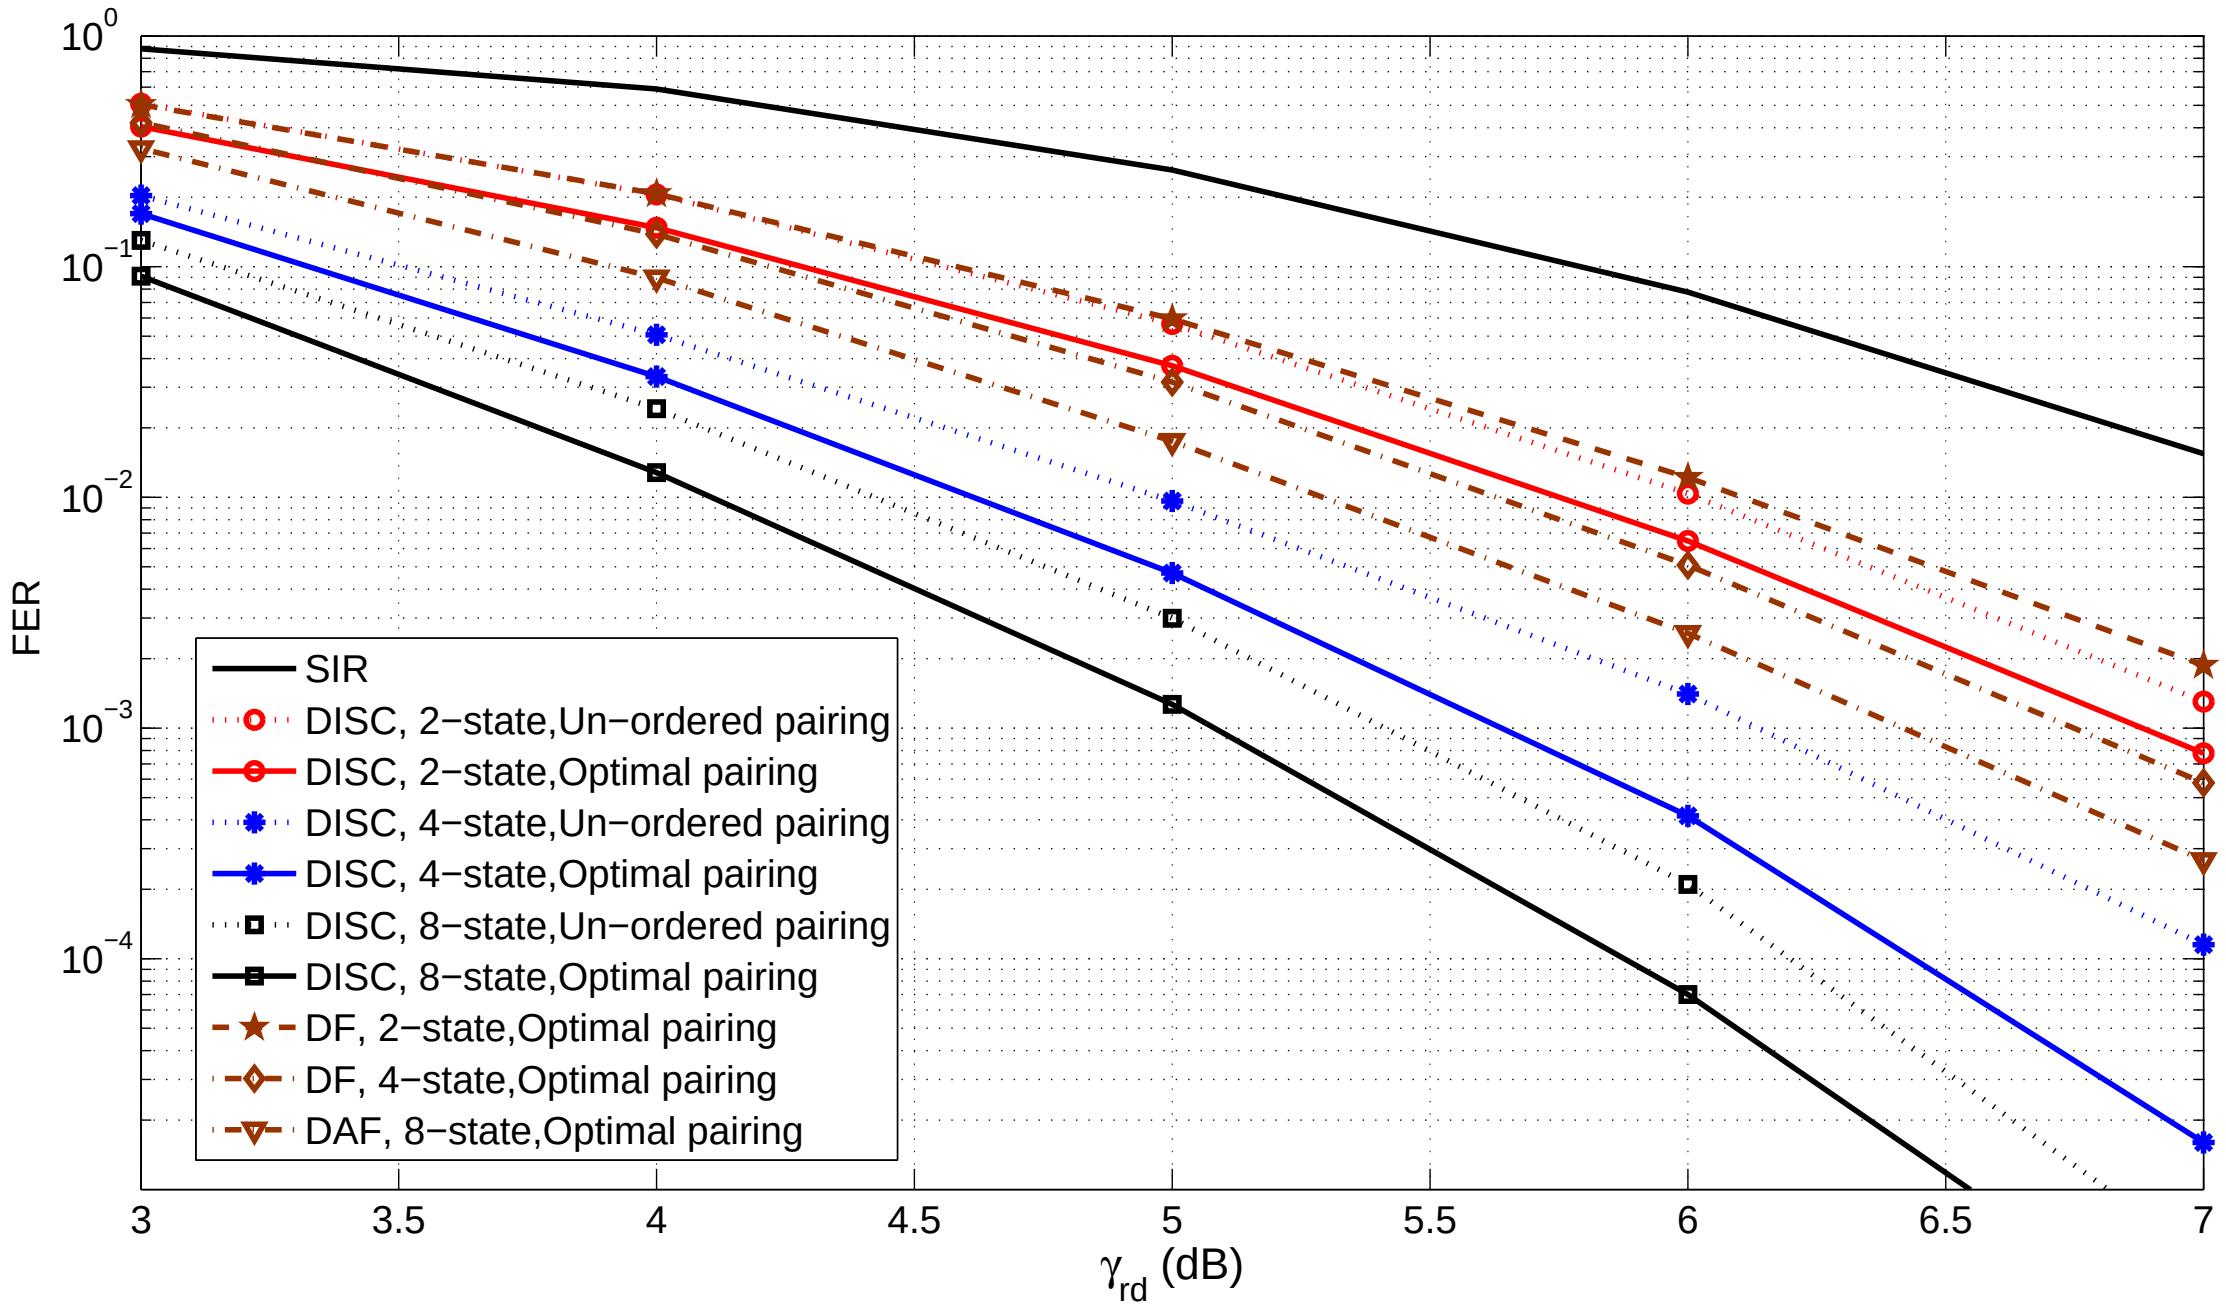

Fig. 9. FER for 3 relays in AWGN Channels, $\bar{\gamma}_{sr} = \bar{\gamma}_{sr,1} = \bar{\gamma}_{sr_2} - 2dB = \bar{\gamma}_{sr_3} - 4dB$, $\bar{\gamma}_{sr} = \bar{\gamma}_{rd} + 3dB$

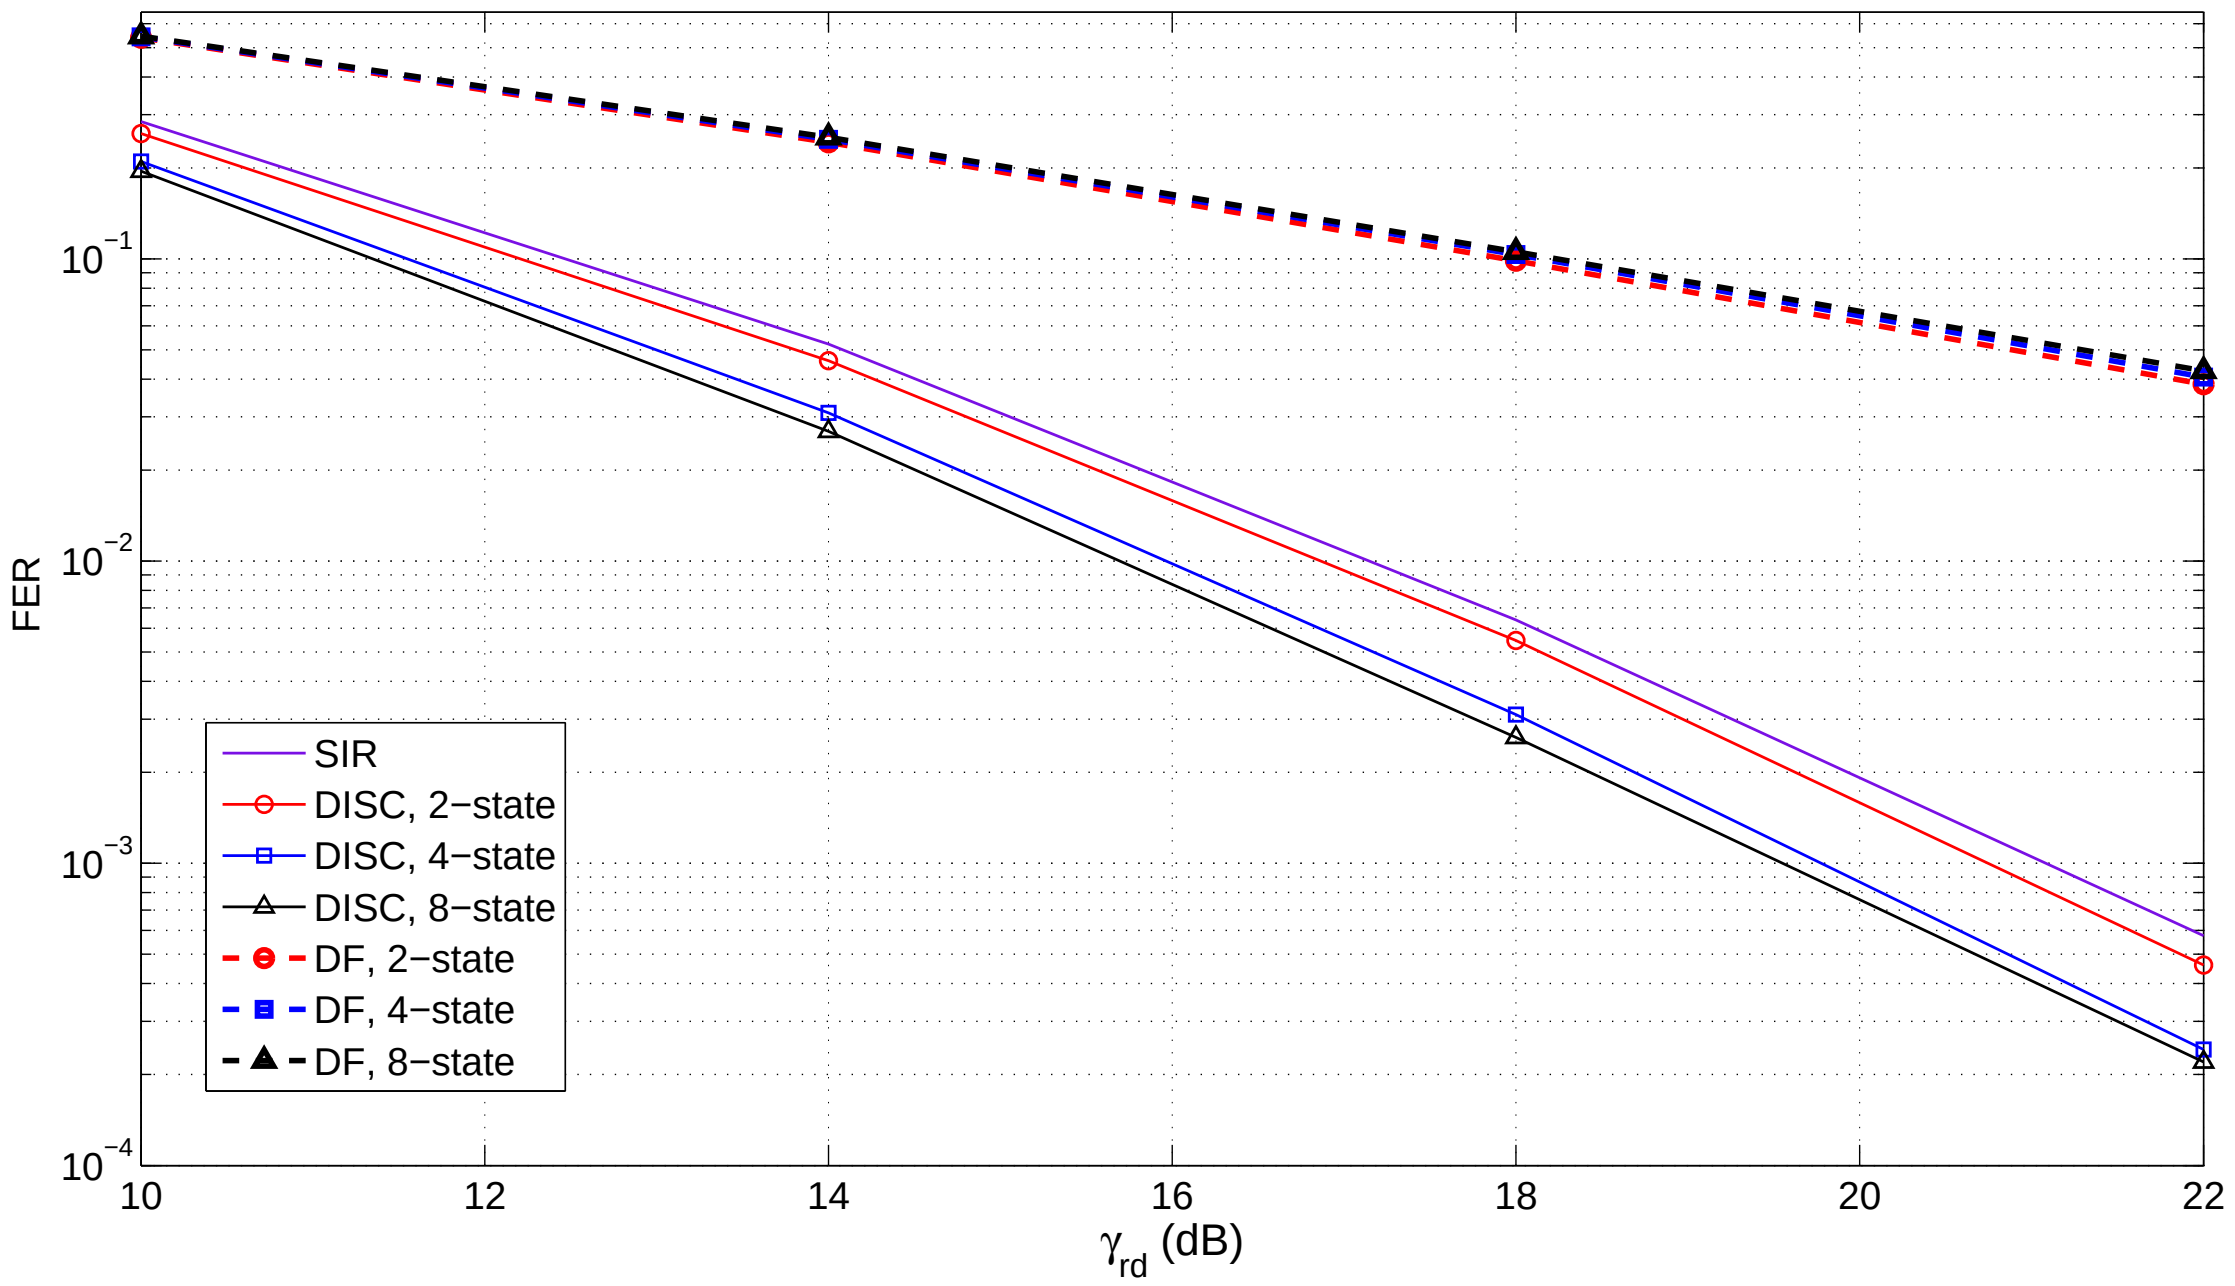

Fig. 10. TFER for 3 relays in fading channels, $\bar{\gamma}_{sr} = \bar{\gamma}_{sr,1} = \bar{\gamma}_{sr_2} = \bar{\gamma}_{sr_3}, \bar{\gamma}_{sr} = \bar{\gamma}_{rd}$

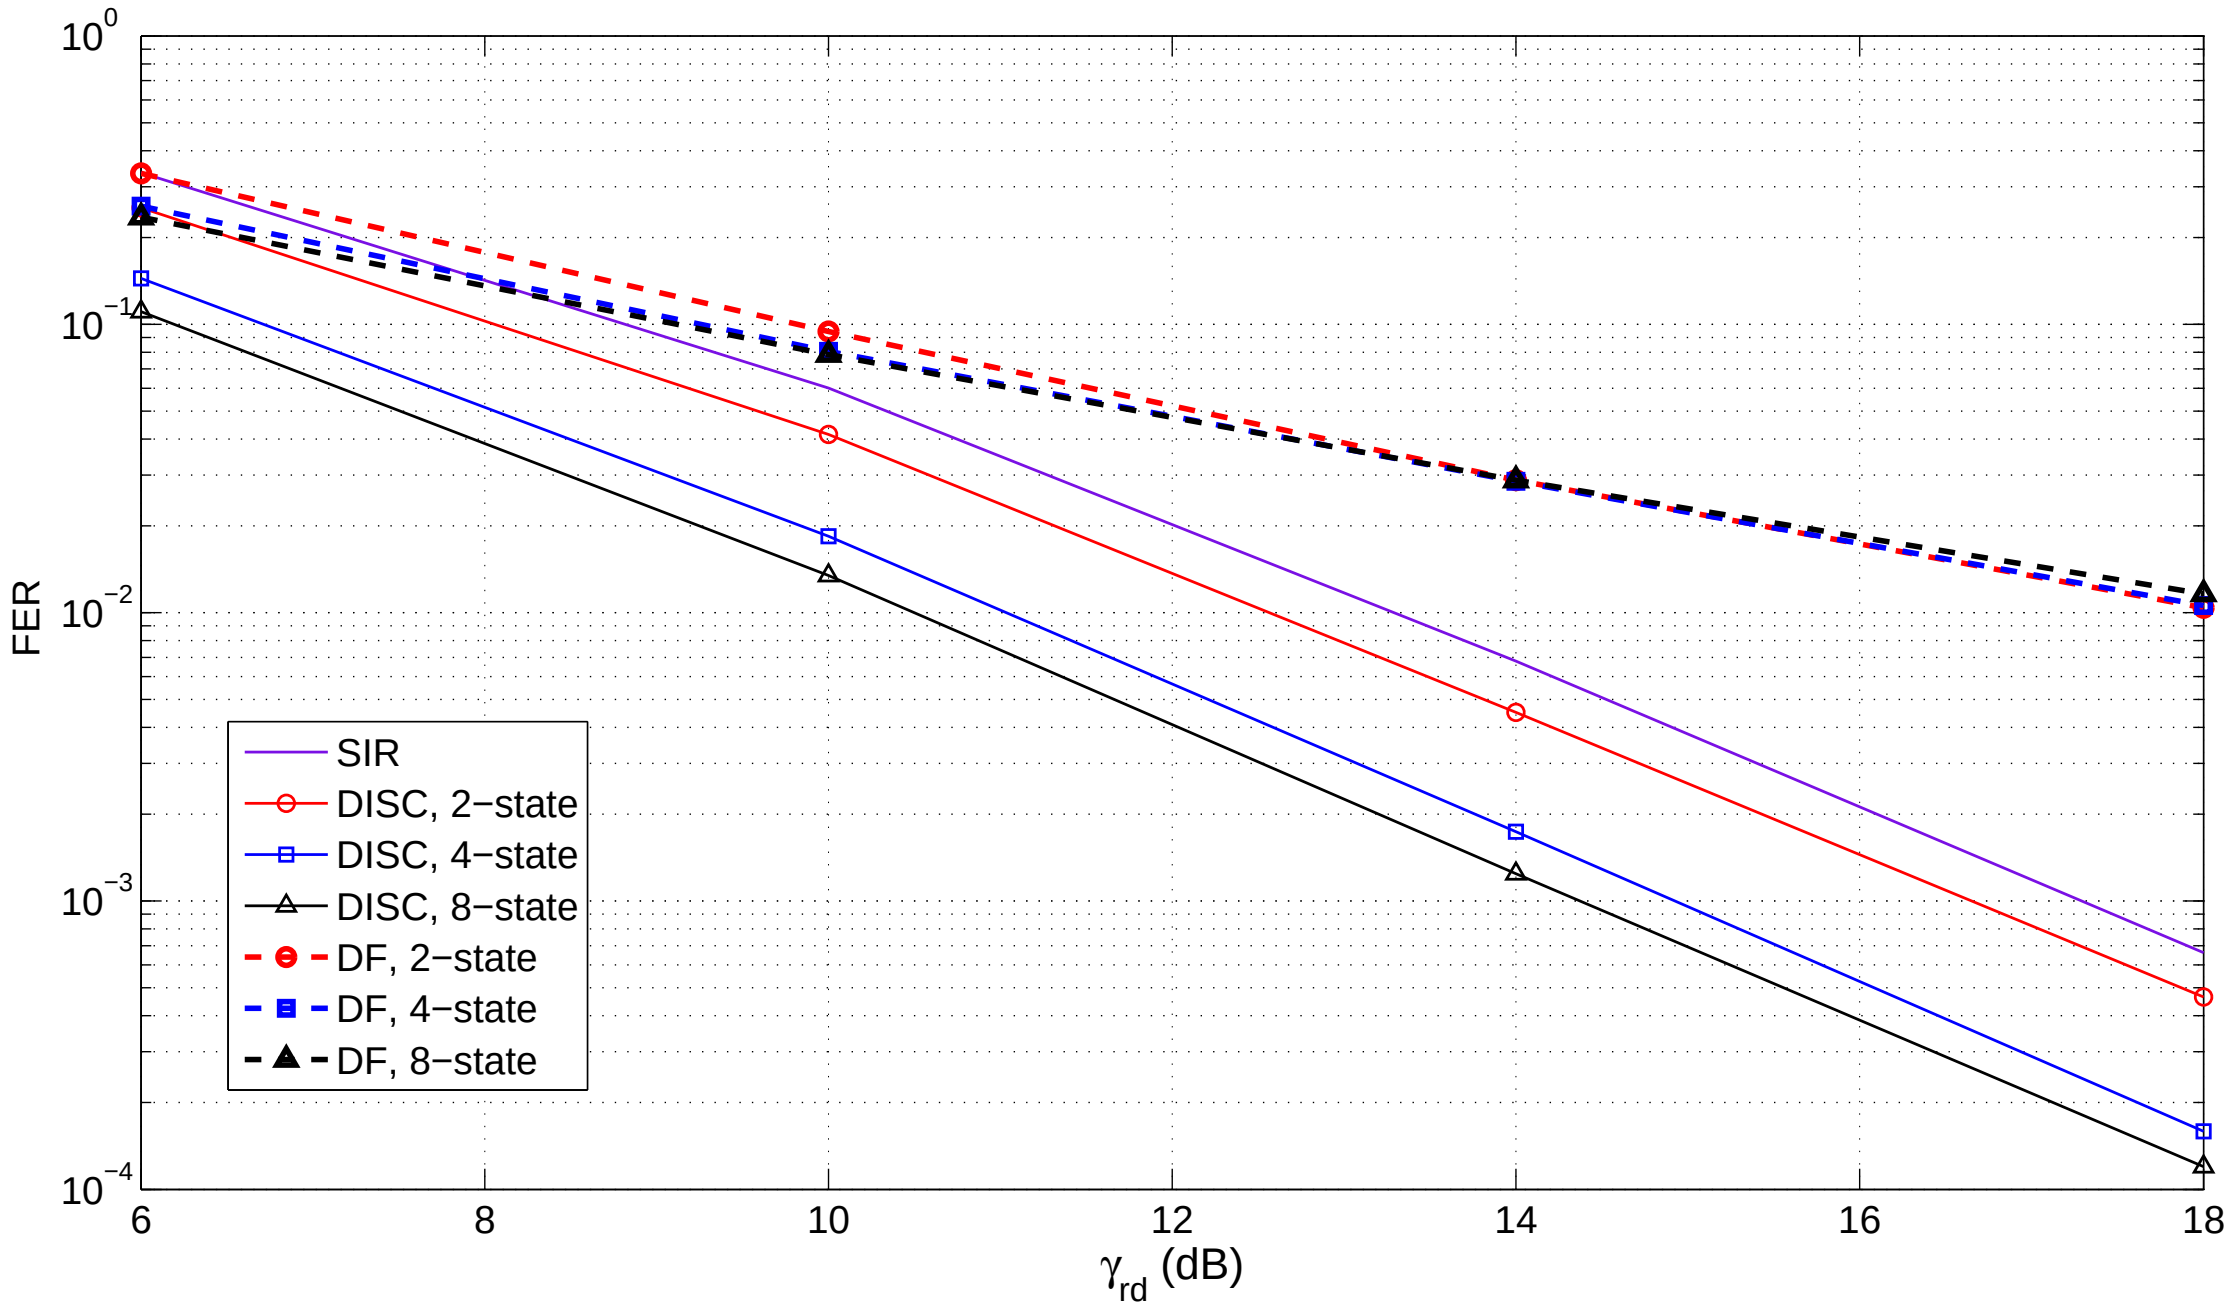

Fig. 11. FER for 3 relays in fading channels, $\bar{\gamma}_{sr} = \bar{\gamma}_{sr,1} = \bar{\gamma}_{sr_2} = \bar{\gamma}_{sr_3}, \bar{\gamma}_{sr} = \bar{\gamma}_{rd} + 10dB$